

LG-4001

Wall Recessed Steplight LED











HARMONY

The Harmony LED Plaster Recessed Light

Revolutionary Plaster light fixture which allows for a truly seamless and trimless installation. Our fixtures are paintable and texturable using standard paint and paint colors.

LED lighting engine is high performance, low power that provides outstanding reliability and color quality/consistency. 2700K, 3000K color temperatures are available with 90 CRI.

- Life Rated for 40,000 hours at 70% lumen maintenance
- · All testing reports are based on published industry procedures
- For best results, do not paint the inside of the fixture. If painting is necessary
 we recommend using a spraying technique. Painting with a brush will reveal
 brush strokes when illuminated.







Quick Info

Application	
New Construction / Remodeling	
Delivered Lumens	Color Quality
80 lm (1W)	90 CRI, 2-step SDCM
Color Temperature	Light Distribution
2700K	Stairway
3000K	Pathway
Input Voltage	Dimming
3V DC (Remote power supply)	TRIAC
Trims	
Gypsum Flangeless (seamless)	
Housing Ratings	Module Ratings
N/A	Wet Location
Guarantee	Additional Dimming Options
40,000 hrs 3 years	0-10 / DALI Dimming / Lutron EcoSystem

LG-4001

Wall Recessed Steplight LED

Project Information:	Project Name:
Fixture Type:	Location:

Ordering Guide

Example Number

PRODUCT CODE

LG-4001 CL2-MR11 30K 90 38 T

LG - 4001

Order Number

<u>LG-4001</u> <u>CL2-MR11</u> <u>90 38</u> ___

MODEL

COLOR TEMPERATURE

□ CL2-MR11 - 80 LUM □ 27K - 2700K

■ 30K - 3000K (STANDARD)

CRI

BEAM SPREAD

■ 90 - 90 CRI

□ 38 °

DIMMING OPTION (Excluded from price)*

- T Triac (STANDARD)
- **a** 0 10
- D Dali
- Eco Hi-lume Premier 0.1% EcoSystem LED driver with soft-on, fade-to-black dimming technology

EXAMPLE:

Switch Leg	Fixture Qty
1	12
2	8
3	9
4	5




^{*} REQUIRED - Zone schedule, please include in your request how many lights on each switch leg.

LG-4001


Wall Recessed Steplight LED

Project Information:	Project Name:
Fixture Type:	Location:

TRIAC Dim Optional Layout

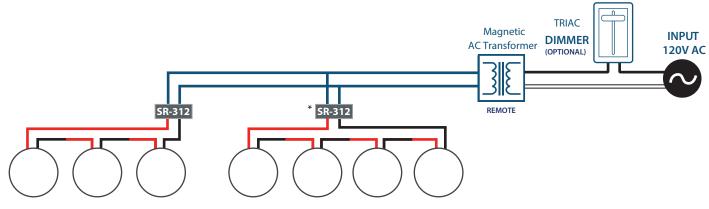

*SR-312 carries a load of 2-5 fixtures

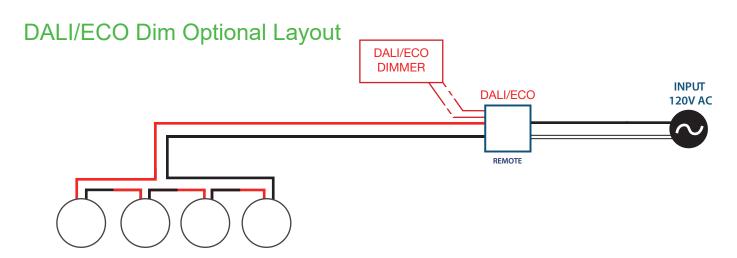

^{*} Carries a load of 4-16 fixtures

