

INSTALLATION INSTRUCTIONS




PREPARING THE LUMINAIRE

HARMONY RECESSED STEPLIGHT LED

Model: LG-4016

SAVE THESE INSTRUCTIONS


Step 1

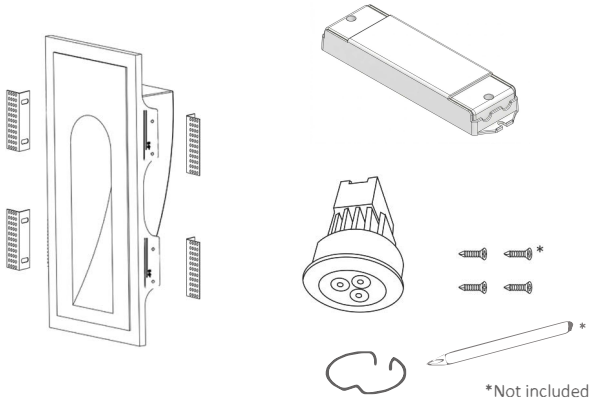

Step 1 - Luminaire Parts and Tools for Installation:

a. Unpack all fixture parts and get to know them.

Step 2 Triac/0-10V/1-10V/Potentiometer/10V PWM 5 in 1 Dimmable LED driver 20/40W




*for 0-10, Dali, or Lutron EcoSystem dimming see online spec sheets.

*SR-312 carries a load of 2-5 fixtures

Step 2 - Remote AC Power and Fixture Connections:

- Connect power supply using conduit fitting (by others) to J-Box.
- Install AC Power and make wiring connections, see Wire Diagram.
- Run low voltage wires ***IN SERIES** to desired fixture locations.

Step 3

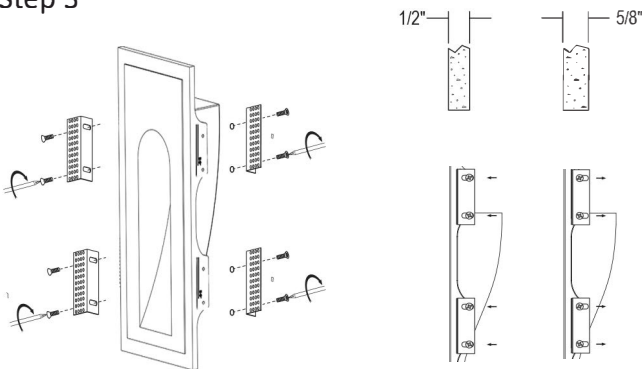

Step 3 - Install Adjustable Bracket to Fixture:

- Place brackets to fixture and fasten them using two screws on each side of fixture.
- Adjust bracket for dry-wall thickness, (Maximum 5/8").
- For stucco finish, please contact Light & Green for additional instructions.
- NOTE:** You may need to set the brackets back further to account for your screw head thickness after mounting the brackets to wall studs.


READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE.

WARNING - Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:

For replacement parts or additional information, contact the manufacturer or visit www.lightandgreen.com.


Step 4

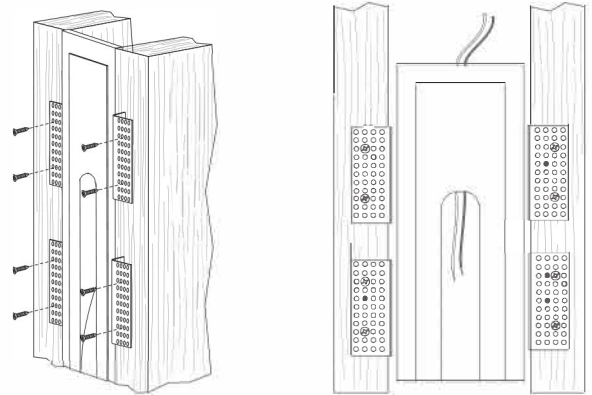

Step 4 - Install Step-Light:

- Mount step-light to wall studs using proper screws (by others).
- Run low voltage wires* through the fixture opening to connect LED Module, *Use 14-18 AWG wire.

Step 5

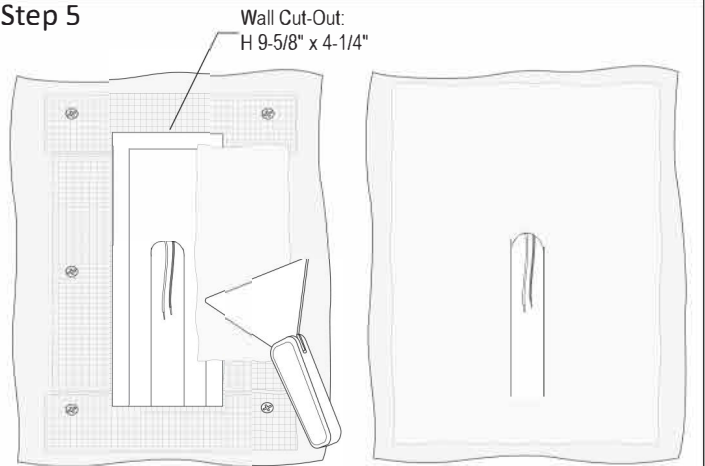

Step 5 - Plastering Wall Cut-Out and Fixture:

- Install drywall so that it is flush with the outer lip of the fixture, adjust the brackets if necessary.
 - Plaster to cover the gap between the fixture and wall cut-out. Apply mudding tape, joining ONLY the outer lip of the fixture to the drywall. **DO NOT OVERLAP TAPE.**
 - Mud over the face of the fixture, avoiding the opening. Remove excess mud from the opening using your finger or blunt object, reestablishing the shape of the opening. Repeat this step until you reach desired texture. Sand and paint*.
- *Only paint the opening of the fixture using a spraying method.


PREPARING THE LUMINAIRE

HARMONY RECESSED STEPLIGHT LED

Model: LG-4009

SAVE THESE INSTRUCTIONS


Step 6

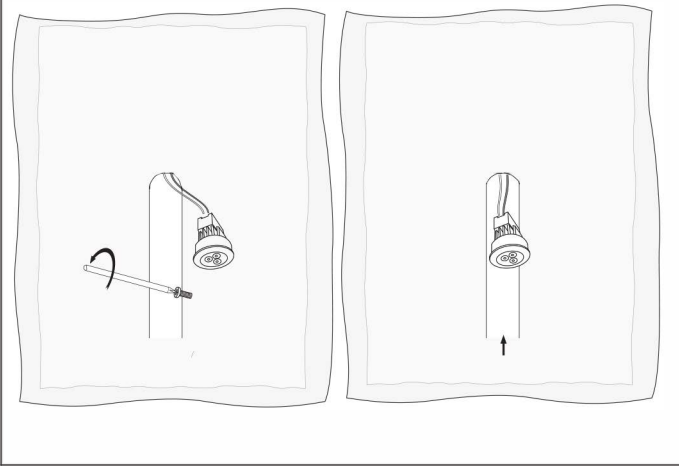

Step 6 - Connect and Install LED Module:

- Unscrew the LED case cover and slide it up to access the wires.
- Insert the LED low voltage wires through the cover top hole and make wiring connections as per diagram on spec sheet.
- Push wiring connection into case and replace the cover with screw.
- IT'S RECOMMENDED TO TURN ON LED MODULES TO CHECK WIRING CONNECTIONS AND PROPERLY WORKING BEFORE PAINTING!!!**

Step 7

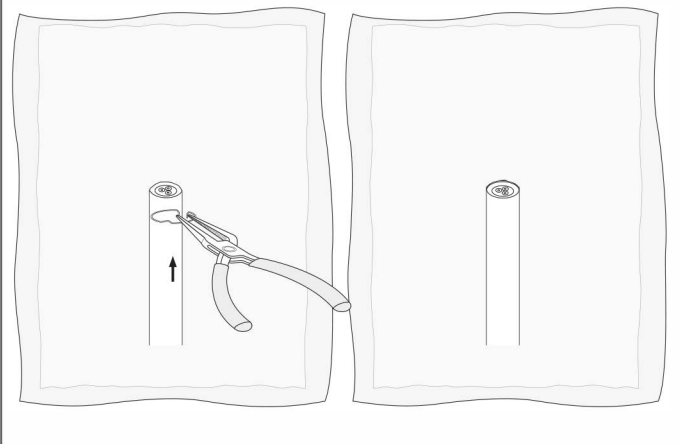

Step 7 - Secure the LED Module:

- Feed the wires and LED module through the opening.
- Use long-nose Pliers to tighten the O-Ring (Provided) and insert into the groove of fixture opening, securing the LED module to prevent fall-down from fixture assembly.

READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE.


WARNING- Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:

For replacement parts or additional information, contact the manufacturer or visit www.lightandgreen.com

Step 8

FINAL INSTALLATION

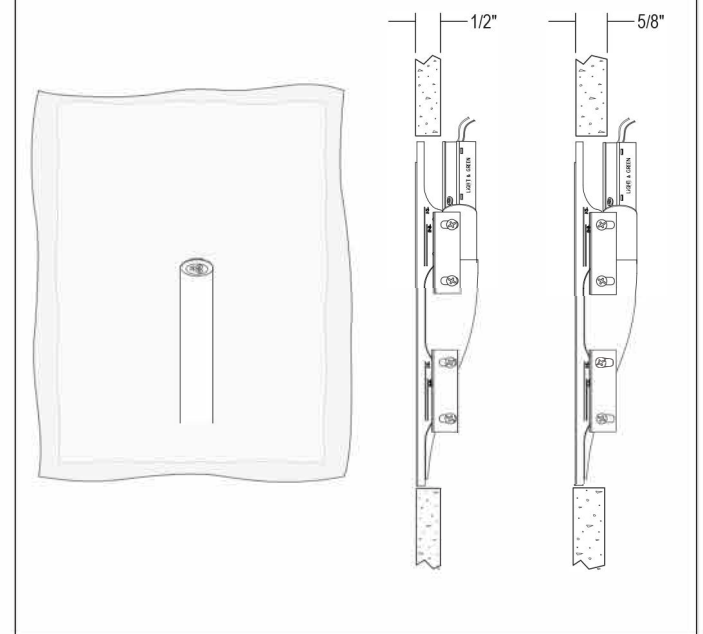

Step 8 - Painting the Fixture to Match the Wall Finish:

- This fixture is paintable including the inside walls to match the finish and texture of the wall.

WARNING:

Do not connect the LED fixtures to the driver while the driver is under power. First, complete all fixture connections in series permanently, then connect the system to the driver and energize the power. Do not disconnect, reconnect, or handle the fixtures while the driver is energized, as this may damage the LEDs.