

LG-9112-AC

Multiple 3" Nonadjustable
Recessed Downlight LED - Triple

Project Information:	Project Name:
Fixture Type:	Location:


HARMONY

Plaster Recessed Downlight LED - 1x3 Round

Harmony downlights are solid plaster lighting solutions made from gypsum, an abundant and stable mineral found in the Earth's crust. Plaster gives you a seamless and trimless lighting application. Our innovative downlight is virtually maintenance free because its monolithic installation eliminates the need for touch ups after servicing. This light fixture does not need a patch in replacement of drywall, saving on materials and installation time. Our flangeless downlights are paintable and manufactured at the highest possible level 5 plaster finish.

LED lighting engine is high performance, low power that provides outstanding reliability and color quality/consistency. 2700K, 3000K, 3500K, and 4000K color temperatures are available with 95 CRI. Also available in Warm dim & Tunable white.

• Life rated for 40,000 hours at 70% lumen maintenance

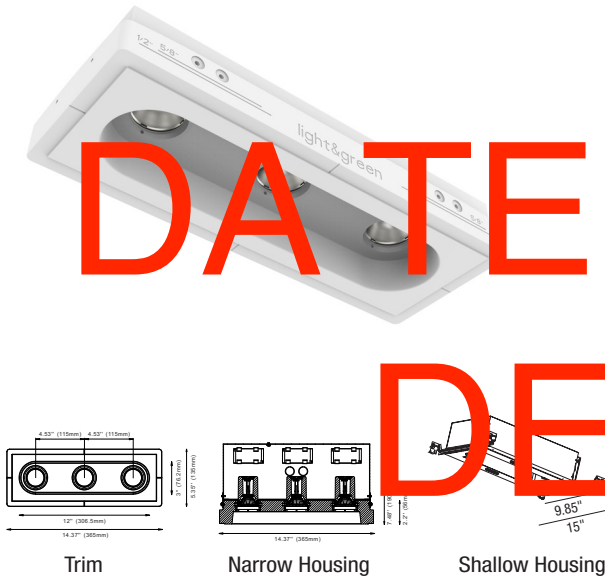

Quick Info



Application

New Construction / Remodeling

Delivered Lumens

3 x 950 lm (9W) / 3 x 1250 lm (13W)

Color Quality

95 CRI, 2-step SDCM

Color Temperature

2700K
3000K
3500K
4000K

Warm Dim Option

1800K-3000K 940 lm (3 x 13W)

Tunable White Option

2700K-6500K 910 lm (3 x 13W)

Light Distribution

General
Wall Wash

Input Voltage

120/277V

Dimming

TRIAC/ ELV

Trims

Gypsum Flangeless (seamless)

Housing Ratings

IC Rated / Air Tight / CCEA

Module Ratings

Wet Location

Guarantee

40,000 hrs | 3 years

Additional Dimming Options

0-10 / Lutron EcoSystem
DALI Dimming (Remote)

LG-9112-AC

Multiple 3" Nonadjustable
Recessed Downlight LED - Triple

Project Information:	Project Name:
Fixture Type:	Location:

Ordering Guide

PRODUCT CODE

LG - 9112 AC

HOUSING

- ☐ N - Narrow (LG-1001/3)
- ☐ S - Shallow (LG-1004/3)

LED OPTIONS

OUTPUT

- ☐ CL2-9MR - 950 LUM (9W) (STANDARD)
- ☐ CL2-13MR - 1250 LUM (13W)

COLOR TEMPERATURE

- ☐ 27K - 2700K
- ☐ 30K - 3000K
- ☐ 35K - 3500K
- ☐ 40K - 4000K

OR

WARM DIM

- ☐ CL2 - 13WD - 1800K - 3000K 940 LUM (13W)

TUNABLE WHITE

- ☐ CL2 - 13TW - 2700K-6500K 910 LUM (13W)

CRI

- ☐ 95 - 95 CRI

BEAM SPREAD

- ☐ 15 °
- ☐ 24 °
- ☐ 38 ° (STANDARD)
- ☐ 60 °

LENS OPTICAL

- ☐ HBL - Honeycomb
- ☐ SF - Soft Focus
- ☐ FR - Frosted
- ☐ LS - Linear Spread
- ☐ PR - Prismatic

LENS HOLDER

- ☐ FL - Flat (STANDARD)

DIMMING OPTION

- ☐ T - Triac/ELV (STANDARD)
- ☐ D - DALI (remote driver)
- ☐ ECO - (Hi - lume Premier 0.1% Eco System LED Driver with Soft-on, Fade-to-black dimming technology)
- ☐ 0 - 10

Example Number

LG-9112 AC N CL2-9W 30K 95 38 SF FL T

Order Number


LG-9112 AC _ _ _ _ _ FL _

LG-9112-AC

Multiple 3" Nonadjustable
Recessed Downlight LED - Triple

Project Information:	Project Name:
Fixture Type:	Location:

ACCESSORIES



Honeycomb Black



Frosted



Flat (WH/BL)



Soft Focus



Linear Spread



Prismatic



15° Light Beam



24° Light Beam



38° Light Beam







60° Light Beam

LG-1004/3

Universal Housing
Shallow

HOUSING

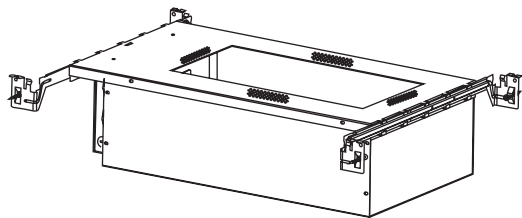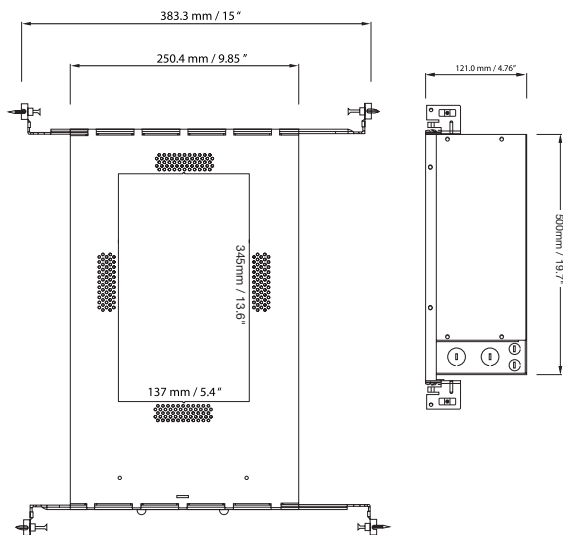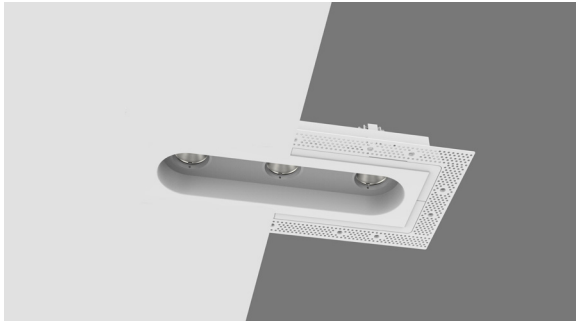

Project Information:	Project Name:
Fixture Type:	Location:

INPUT 120/277V

HOUSING RATING - UL, cUL, IC-rated, Air tight
CCEA (Chicago Platinum)

DRIVER - In the junction box

- TRIAC/ELV less than 1% (Standard)
- 0-10
- Lutron Hi-lume Premier 0.1% Eco System LED Driver with soft-on, fade-to-black dimming technology
- DALI (Remote)

MOUNTING - Shallow housing includes universal mounting brackets and hanger bars




CEILING INSTALLATION



LG-1001/3

Universal Housing
Narrow

HOUSING

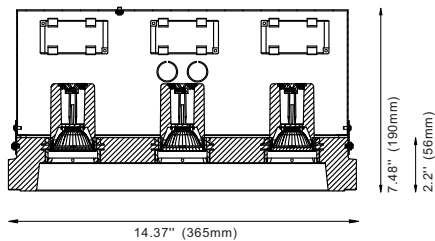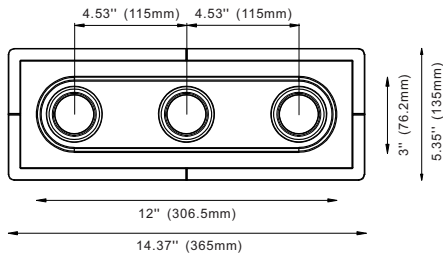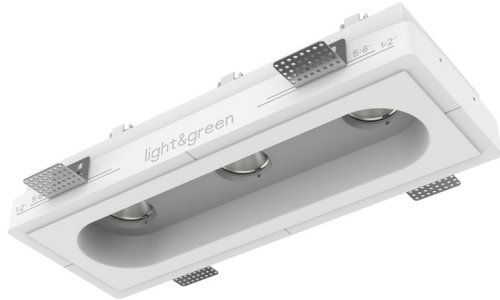

Project Information:	Project Name:
Fixture Type:	Location:

INPUT 120/277V

HOUSING RATING - UL, cUL, IC rated, Air tight
CCEA (Chicago Platinum)

DRIVER - In the junction box

- TRIAC/ELV less than 1% (Standard)
- 0-10
- Lutron Hi-lume Premier 0.1% Eco System LED Driver with soft-on, fade-to-black dimming technology
- DALI (Remote)

MOUNTING - Narrow housing includes mounting brackets


CEILING INSTALLATION



LG-9112-AC

Multiple 3" Nonadjustable
Recessed Downlight LED - Triple

TRIM

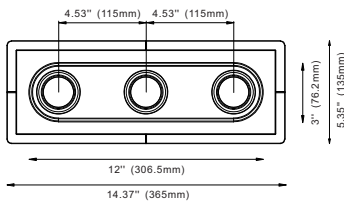

Project Information:	Project Name:
Fixture Type:	Location:

LED TYPE	CL2-9W CITIZEN	CL2-13W CITIZEN	Warm Dim CL2-13WD BRIGLUXE	Tunable White CL2-13WT BRIGLUXE
DELIVERED LUMENS	950	1250	940	910
WATTS	3 x 9W	3 x 13W	3 x 13W	3 x 13W
CRI	95			
COLOR TEMPERATURE	2700K / 3000K / 35000K / 4000K		1800K -3000K	2700K -6500K
VOLTAGE	120V / 277V			
DIMMING	<ul style="list-style-type: none">• TRIAC /ELV (Down to > 1%) - STANDARD• 0 -10 v (Down to > 5%)• Lutron (Hi-lume Premier 0.1 % Eco System LED Driver with Soft-on, Fade-to-black dimming technology)• DALI (Remote)			
POWER SUPPLY x 3	Constant current driver 36Vdc /250mA	Constant current driver 36Vdc /350mA	Constant current driver 36Vdc/350mA	Constant current driver 36Vdc /350mA
BEAM SPREAD	15°/24°/38°/60°			
OPTICS	Soft Focus/ Frosted / Linear Spread/ Prismatic			
DIFFUSERS	Honeycomb			
ADJUSTABILITY	Non Adjustable			
HOUSING	IC RATED/AIR TIGHT/CCEA (CHICAGO PLEANUM)			
FINISH	GYPSUM/SEAMLESS			

Product Features

- Revolutionary flush mounted, trimless & seamless design
- Made out of Environmentally Friendly Plaster Materials
- Our plaster fixture can be painted using your standard paint colors
- Energy efficient LED light engines
- Versatile field changeable optics
- Dimmable with a variety of commonly used drivers
- Fixtures can be used with all Smart House Systems such as Lutron, Vantage, Control 4, Crestron and others
- Easy installation for new construction and remodel applications
- Wet Location rated