

LG-5008F

6 Foot - 4 Wire Track

2 and 3 Circuit Track - Multi Compatible

TECHINCAL DETAILS - LG-5008F

Body Construction

- Constructed of durable injection-molded plastic, steel and Aluminum

Electrical

- 3-Circuit power distribution system designed to extend the power between two track sections. With two (3) hot terminals and one common neutral, each circuit is rated 20A(2 x 20A = 40A max)

Compatibility

- Track is Compatible with all Light and Green 4 wire track fixtures + 2 and 3 circuit accessories and connectors.
- The track and it's accessories include screws to secure it in place.
- All track sections supplied with two insulated end caps.


Description

- Light and Green 3-phase track is a high quality track system.
- The comprehensive range of Light and Green track accessories, gives Designer's the freedom choice, while making a track plan. The track can is easily shortened, with a metal saw. After cutting the track it is ready to install (no wiring adjustment needed).

Mounting

- The LG-5008F can be mounted as a Flush Pendant.

PHOTOGRAPH - LG-5008F





DESCRIPTION - LG-5008F

- Light and Green LG-5008F 2 and 3 Circuit Track
- 6 feet (72 inches)
- Available in Black and white
- cULus Listed



TECHNICAL DRAWING / POLARITY GROOVE - LG-5008F

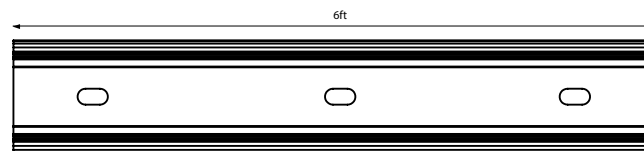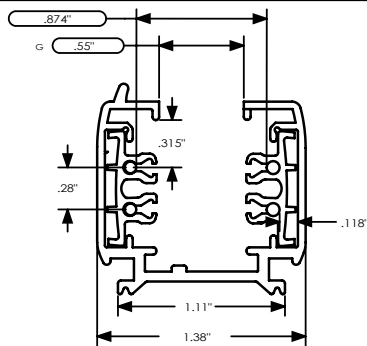

ORDERING GUIDE - LG-5008F

LG-5008F -

Color/Finish

BK : Black

WH : White


EXAMPLE : LG-5008F-BK

LG-5008F


6 Foot - 4 Wire Track

2 and 3 Circuit Track - Multi Compatible

CONNECTING DIAGRAMS


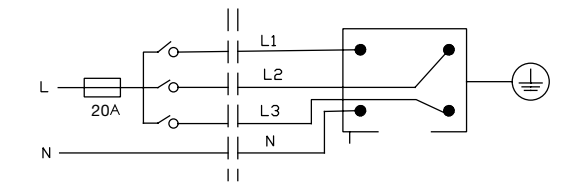


1 phase 120V 20A Max

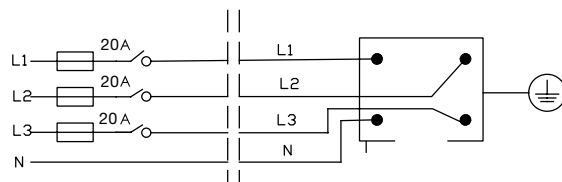

3 phase 120V 3x20A Max

3-Circuit Track





L1, L2, L3: fase, life wire
N: neutral




1-Circuit Track DALI/0-10/ECO

Compatible to standard 3-CircuitTrack



L: fase, life wire
N: neutral
D1, D2: DALI/0-10/ECO

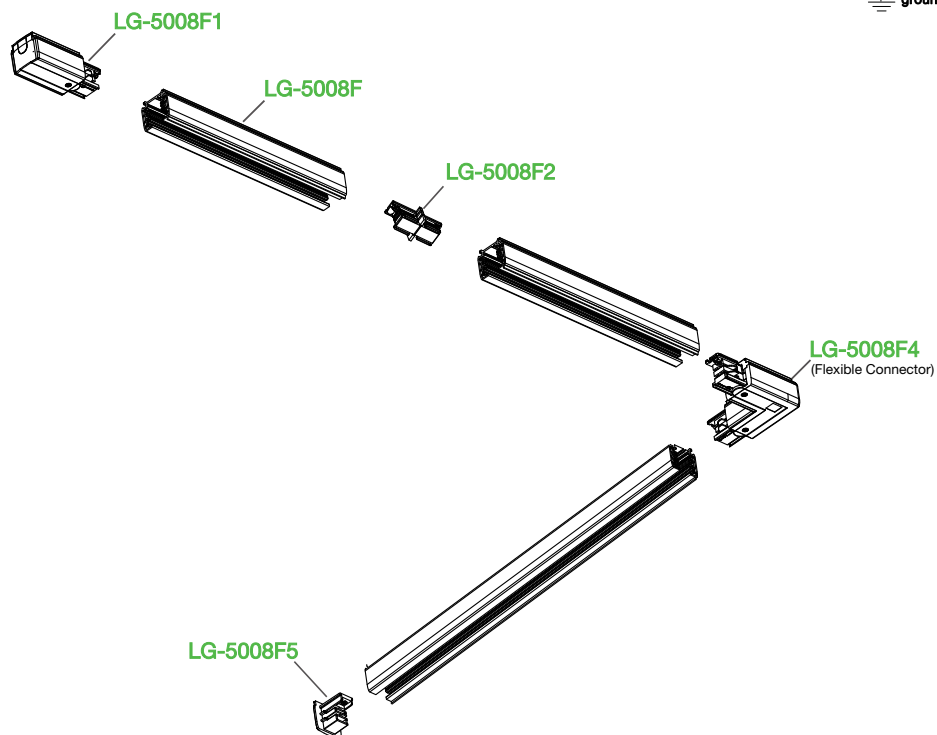

LG-5008F1

3 Circuit Live end Connector - Ground on Left 3 Circuit Track Compatible

TECHINCAL DETAILS - LG-5008F1

Body Construction

- Constructed of durable injection-molded plastic, steel and Aluminum

Electrical

- 3-Circuit power distribution system designed to extend the power between two track sections. With two (2) hot terminals and one common neutral, each circuit is rated 20A(2 x 20A = 40A max)

Compatibility

- End Connector is Compatible with all Light and Green 4 wire track fixtures and 3-circuit accessories and connectors.

- The track and accessories include screws to secure it in place

Mounting

- This Live end Connector is placed at the end of a track

Labels

- cULus Listed

PHOTOGRAPH - LG-5008F1





DESCRIPTION - LG-5008F1

- Light and Green LG-5008F1 3-Circuit Live End Connector
- Available in Black and white



TECHNICAL DRAWING / POLARITY GROOVE - LG-5008F1

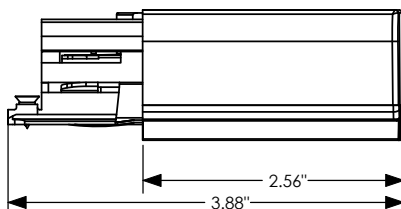

ORDERING GUIDE - LG-5008F1

LG-5008F1 -

Color/Finish

BK : Black

WH : White

EXAMPLE : LG-5008F1 - BK

LG-5008F2

3 Circuit Mini Joiner

3 Circuit Track Compatible

TECHINCAL DETAILS - LG-5008F2

Body Construction

- Constructed of durable injection-molded plastic, steel and Aluminum

Electrical

- 3-Circuit power distribution system designed to extend the power between two track sections. With two (2) hot terminals and one common neutral, each circuit is rated 20A(2 x 20A = 40A max)

Compatibility

- Connector is Compatible with all Light and Green 4 wire track fixtures and 3-circuit accessories and connectors
- The track and accessories include screws to secure it in place


Mounting

- This Mini Joiner Connector is placed at the end of a track

Labels

- cULus Listed

PHOTOGRAPH - LG-5008F2

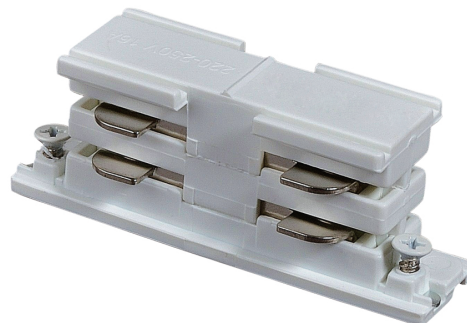


DESCRIPTION - LG-5008F2

- Light and Green LG-5008F2 3-Circuit Mini Joiner Connector
- Available in Black and white



TECHNICAL DRAWING / POLARITY GROOVE - LG-5008F2

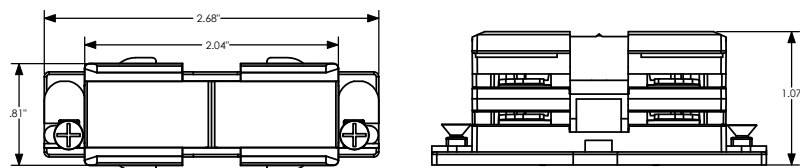

ORDERING GUIDE - LG-5008F2

LG-5008F2 -

Color/Finish

BK : Black

WH : White

EXAMPLE : LG-5008F2 - BK

LG-5008F3

3 Circuit Straight Connector 3 Circuit Track Compatible

TECHINCAL DETAILS - LG-5008F3

Body Construction

- Constructed of durable injection-molded plastic, steel and Aluminum

Electrical

- 3-Circuit power distribution system designed to extend the power between two track sections. With two (3) hot terminals and one common neutral, each circuit is rated 20A(2 x 20A = 40A max)

Compatibility

- Connector is Compatible with all Light and Green 4 wire track fixtures and 3-circuit accessories and connectors.
- The track and accessories include screws to secure it in place


Mounting

- This Mini Joiner Connector is placed at the end of a track

Labels

- cULus Listed

PHOTOGRAPH - LG-5008F3

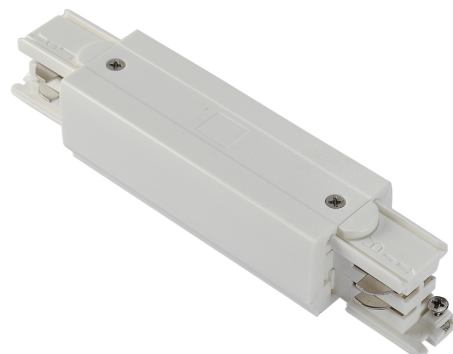


DESCRIPTION - LG-5008F3

- Light and Green LG-5008F3 3-Circuit Mini Joiner Connector
- Available in Black and white



TECHNICAL DRAWING / POLARITY GROOVE - LG-5008F3

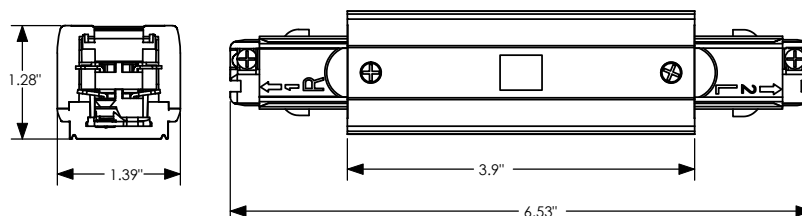

ORDERING GUIDE - LG-5008F3

LG-5008F3 -

BK : Black

WH : White

EXAMPLE : LG-5008F3 - BK

LG-5008F4

3 Circuit I Flexible Connector

3 Circuit Track Compatible

TECHINCAL DETAILS - LG-5008F4

Body Construction

- Constructed of durable injection-molded plastic, steel and Aluminum

Electrical

- 3-Circuit power distribution system designed to extend the power between two track sections. With two (3) hot terminals and one common neutral, each circuit is rated 20A(2 x 20A = 40A max)

Compatibility

- Flexible Connector is Compatible with all Light and Greenwire track fixtures and 3-circuit accessories and connectors.
- The track and accessories include screws to secure it in place


Mounting

- This Flexible I Connector is placed between two Light and Green electrified tracks

Labels

- cULus Listed

PHOTOGRAPH - LG-5008F4

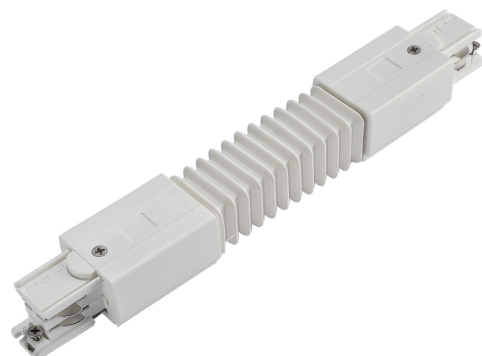


DESCRIPTION - LG-5008F4

- Light and Green LG-5008F4 3-Circuit track Flexible I Connector
- Available in Black and white



TECHNICAL DRAWING / POLARITY GROOVE - LG-5008F4

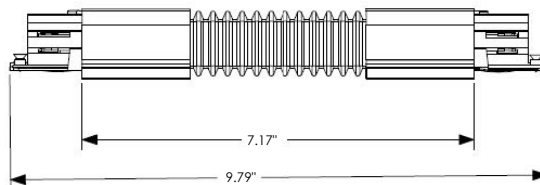

ORDERING GUIDE - LG-5008F4

LG-5008F4 -

Color/Finish

BK : Black

WH : White

EXAMPLE : LG-5008F4 - BK

LG-5008F5

3 Circuit Adapter

3 Circuit Track Compatible

TECHINCAL DETAILS - LG-5008F5

Body Construction

- Constructed of durable injection-molded plastic, steel and Aluminum

Electrical

- 3-Circuit power distribution system designed to extend the power between two track sections. With two (3) hot terminals and one common neutral, each circuit is rated 20A(2 x 20A = 40A max)

Compatibility

- I-connector is Compatible with all Light and Green 4 wire track fixtures and 3-circuit accessories and connectors.
- The track and accessories include screws to secure it in place


Mounting

- This adapter is placed between the Light and Green track and compatible fixtures.

Labels

- cULus Listed

PHOTOGRAPH - LG-5008F5

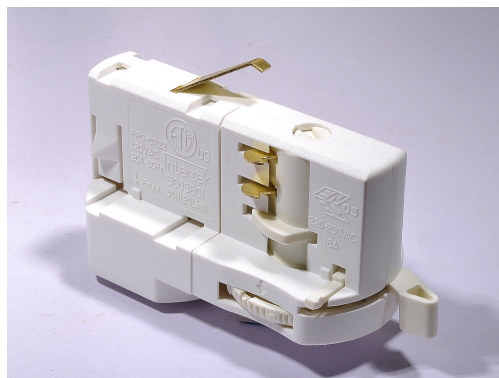


DESCRIPTION - LG-5008F5

- Light and Green LG-5008F5 3-Circuit Adaptor
- Available in Black and white



TECHNICAL DRAWING / POLARITY GROOVE - LG-5008F5

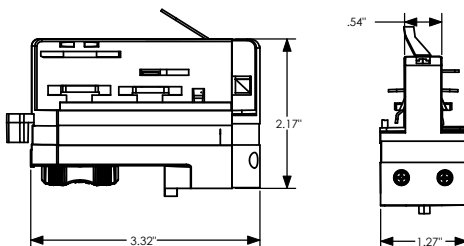

ORDERING GUIDE - LG-5008F5

LG-5008F5 -

BK : Black
WH : White

EXAMPLE : LG-5008F5-BK