

Indoor Luminaire Photometric Data


Description Information

Luminary Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Date: 2/18/2021
Manufacture: Light and Green	Shld.Ang(°):	Test Machine:GON-2000
Test Lab: LIGHT LABORATORY, INC. (www.lightlaboratory.com)	Frequency(Hz):	Lamp CCT(K): Ra:
Lum. Size(W*L*H):0.110m*0.000m*0.170m	Lum. Area(m2):0.000	Lum. W(kg):
Test System: C, γ	Test Step: C=5.0 γ=2.5	Temp.(°C):
		Humidity(%):


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 96.013	Luminary Flux(lm): 96.013	Field Angle(10%Imax): 48.5(°)
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 86.202lm 89.78%
Rated Voltage(V):	Luminary EER(lm/W): 60.768	Up Lumens&Percent: 9.812lm 10.22%
Tested Power(W): 1.580	Max. Candela(cd): 292.310	S/MH: C0_a180=5.485 C90_270=2.918
Lamps' Inside: 1	Max Cand@Ang.(°): C=0.0 γ=40.0	CIE Type: General Diffuse
Tested Electrics(V, A, pf):	Beam Angle(50%Imax): 28.5(°)	ErP Φ use(120°): 73.552lm
Lamp Size(W*L*H):0.110m*0.000m*0.170m	Left=27.5°, Right=56.1°	IRF(%): 323.970

C Plane Distribution Diagram

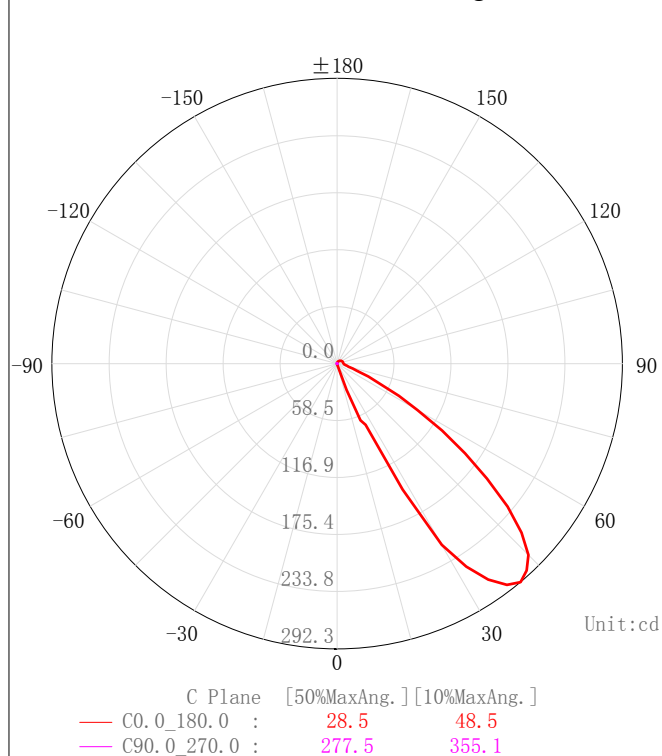



C0 Space ISO Illuminance Curve

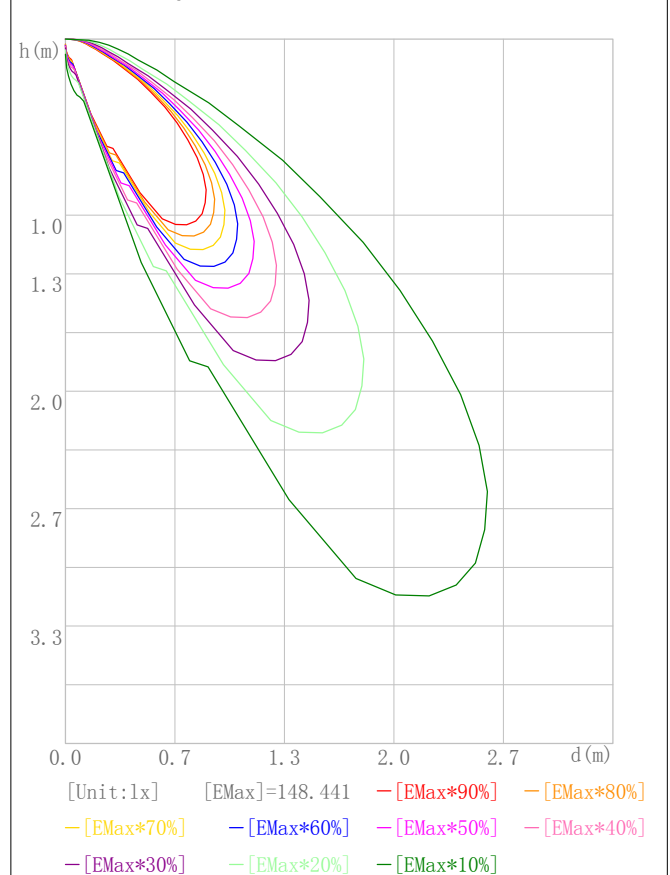

2D Plane Light Intensity Distribution Curve

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lig
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

C Plane Distribution Diagram

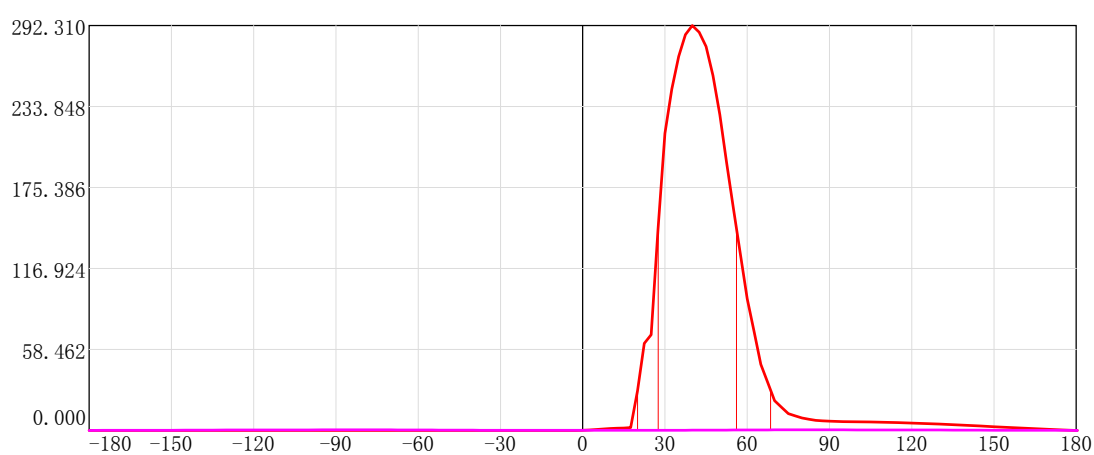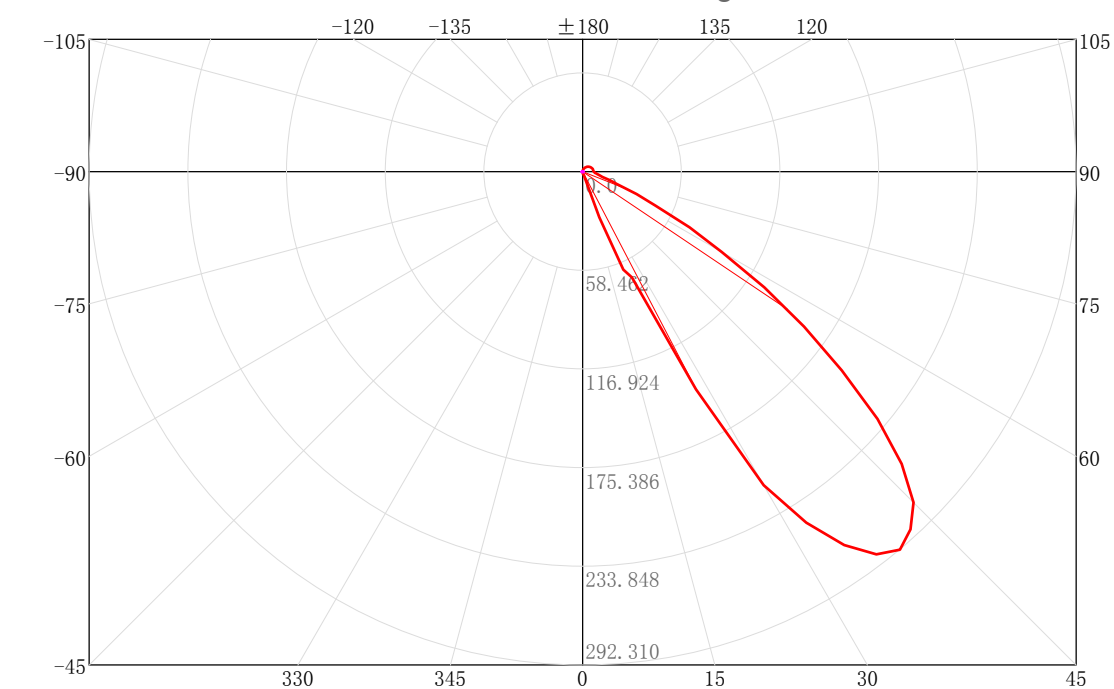


C Plane [50%MaxAng.] [10%MaxAng.]
 — C0.0_180.0 : 28.5 48.5
 — C90.0_270.0 : 277.5 355.1

Unit:cd

3D Light Intensity Distribution Modal

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lig
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

3D Light Intensity Distribution Modal

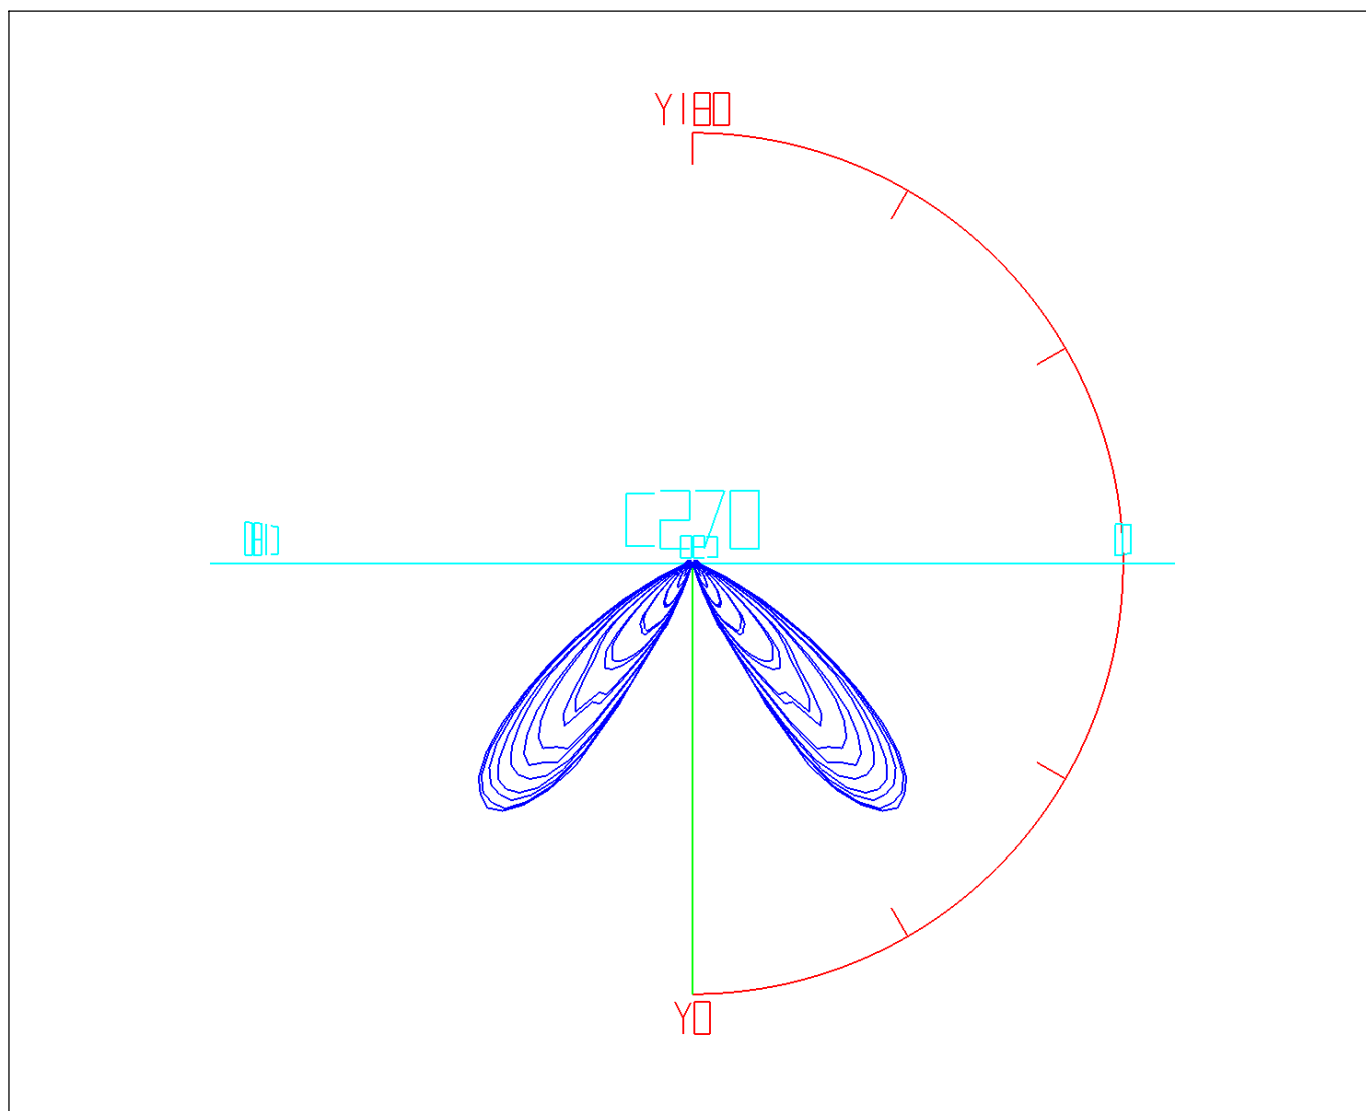

Curves: 3D Model ——— Fixture ——— Vert. HUD ——— Hori. HUD ———
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report
Photometric Filename:LG-4005.IES


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-2.5	0.00	0.00	0.00	0.00	145.0-150.0	0.27	95.56	0.28	99.53
2.5-5.0	0.00	0.00	0.00	0.00	150.0-155.0	0.19	95.76	0.20	99.73
5.0-7.5	0.01	0.01	0.01	0.01	155.0-160.0	0.13	95.88	0.13	99.86
7.5-10.0	0.02	0.03	0.02	0.03	160.0-165.0	0.08	95.96	0.08	99.94
10.0-12.5	0.03	0.05	0.03	0.06	165.0-170.0	0.04	96.00	0.04	99.98
12.5-15.0	0.04	0.09	0.04	0.09	170.0-175.0	0.01	96.01	0.01	100.00
15.0-17.5	0.05	0.14	0.05	0.14	175.0-180.0	0.00	96.01	0.00	100.00
17.5-20.0	0.16	0.30	0.17	0.32					
20.0-22.5	0.51	0.82	0.53	0.85					
22.5-25.0	1.02	1.83	1.06	1.91					
25.0-27.5	1.77	3.61	1.85	3.76					
27.5-30.0	2.83	6.43	2.94	6.70					
30.0-32.5	3.95	10.39	4.12	10.82					
32.5-35.0	5.05	15.43	5.25	16.07					
35.0-37.5	5.91	21.34	6.16	22.23					
37.5-40.0	6.58	27.93	6.86	29.08					
40.0-42.5	7.04	34.96	7.33	36.41					
42.5-45.0	7.12	42.08	7.42	43.83					
45.0-47.5	6.91	48.99	7.20	51.03					
47.5-50.0	6.45	55.44	6.72	57.75					
50.0-52.5	5.77	61.21	6.01	63.76					
52.5-55.0	4.97	66.18	5.17	68.93					
55.0-57.5	4.11	70.29	4.28	73.21					
57.5-60.0	3.26	73.55	3.40	76.61					
60.0-62.5	2.54	76.09	2.64	79.25					
62.5-65.0	1.95	78.04	2.03	81.28					
65.0-67.5	1.48	79.52	1.55	82.82					
67.5-70.0	1.15	80.67	1.20	84.02					
70.0-72.5	0.92	81.59	0.96	84.98					
72.5-75.0	0.79	82.38	0.82	85.80					
75.0-77.5	0.71	83.09	0.74	86.54					
77.5-80.0	0.66	83.75	0.69	87.23					
80.0-82.5	0.63	84.39	0.66	87.89					
82.5-85.0	0.61	85.00	0.64	88.53					
85.0-87.5	0.60	85.60	0.63	89.16					
87.5-90.0	0.60	86.20	0.62	89.78					
90.0-95.0	1.18	87.38	1.23	91.01					
95.0-100.0	1.15	88.54	1.20	92.21					
100.0-105.0	1.11	89.64	1.15	93.36					
105.0-110.0	1.04	90.68	1.08	94.45					
110.0-115.0	0.96	91.64	1.00	95.44					
115.0-120.0	0.87	92.50	0.90	96.34					
120.0-125.0	0.77	93.27	0.80	97.14					
125.0-130.0	0.66	93.93	0.69	97.83					
130.0-135.0	0.56	94.49	0.58	98.41					
135.0-140.0	0.45	94.94	0.47	98.88					
140.0-145.0	0.36	95.30	0.37	99.25					

Rectangle ISO Lighting Intensity Diagram

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lightandgreen.com)
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

ISO Lighting Intensity Curve

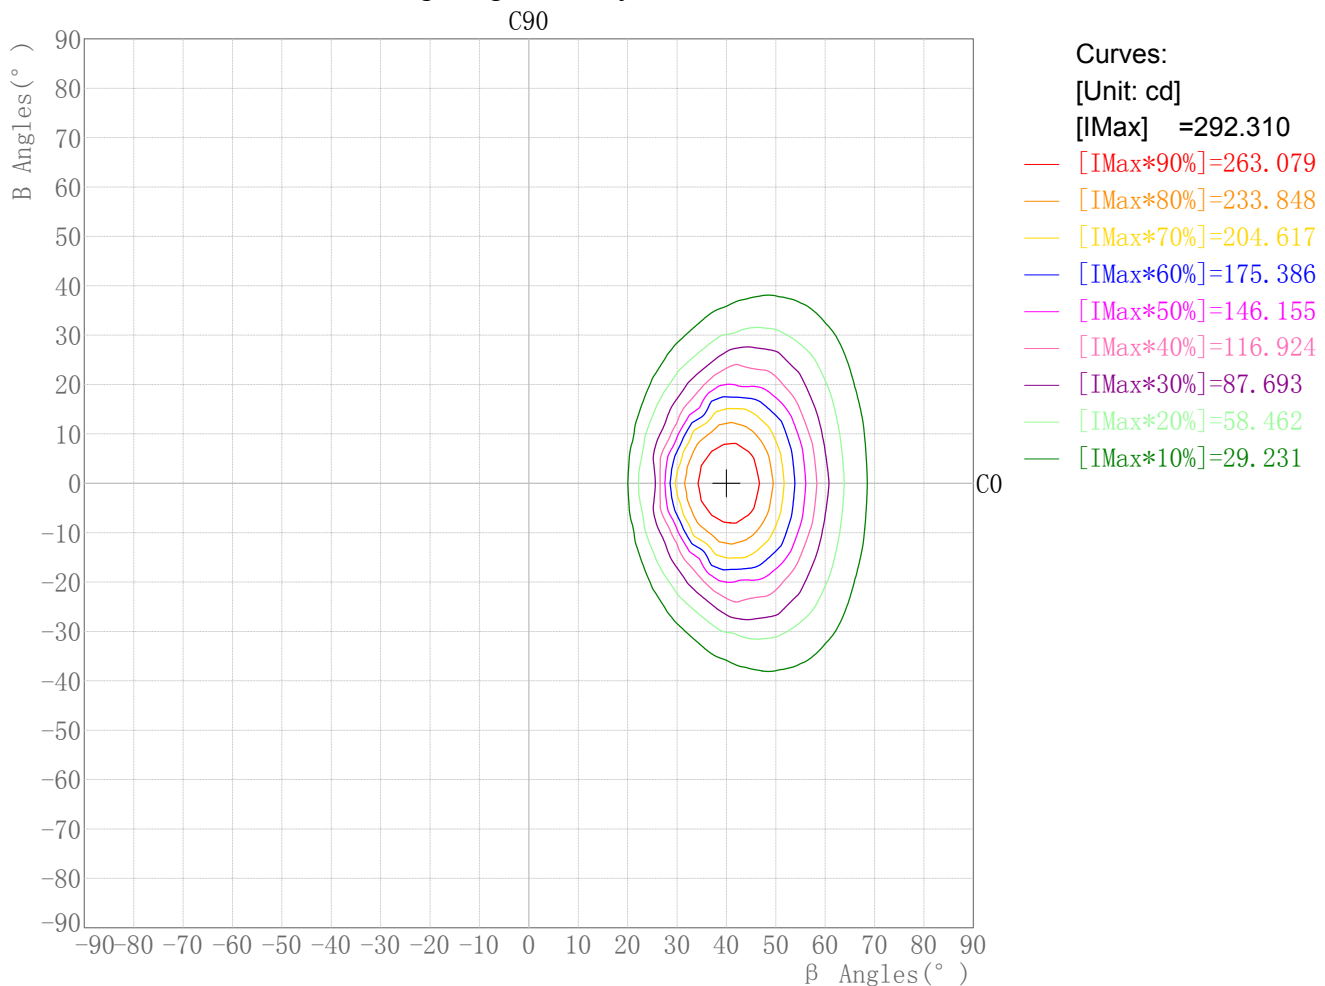


Maximum Light Intensity(cd): 292.31

Maximum Cand.@Angle: H=40.0°,V=0.0°

Plane ISO-Illuminance Diagram

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lightandgreen.com)
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

Plane ISO-Illuminance Curve

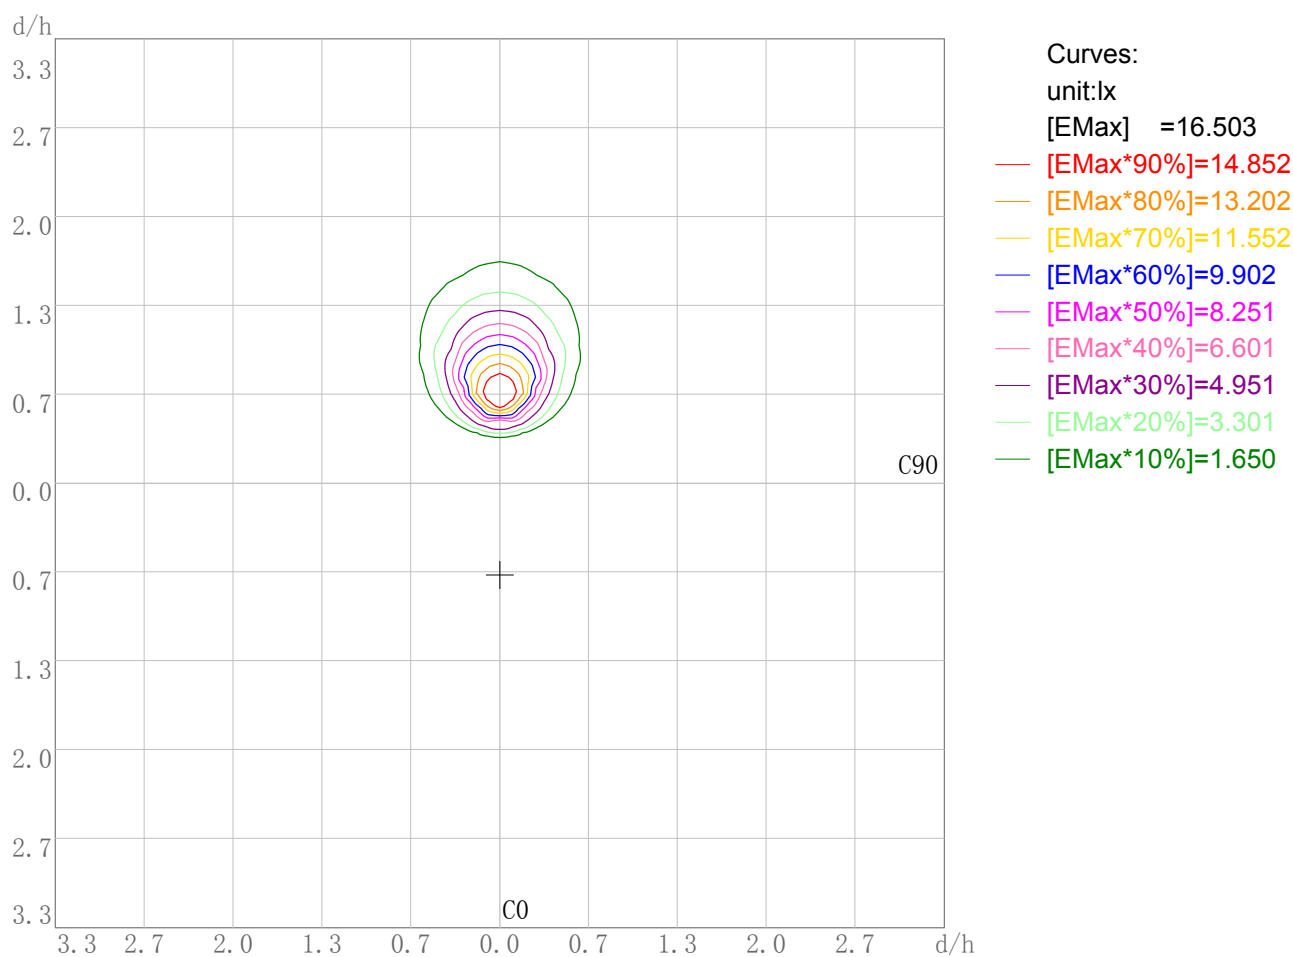

Working Plane Luminaire Mounting Height(m): 3.00


Working Plane Maximum Illuminance(lx): 16.50

Working Plane Maximum Illuminance Position(d/h):H0.0 V0.7

3D Plane ISO Illuminance Diagram

Lum. Name: LED STEP LIGHT	Lum. Catelog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catelog:	Test Lab: LIGHT LABORATORY, INC. (www.lig
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021


3D Plane Illuminance Modal

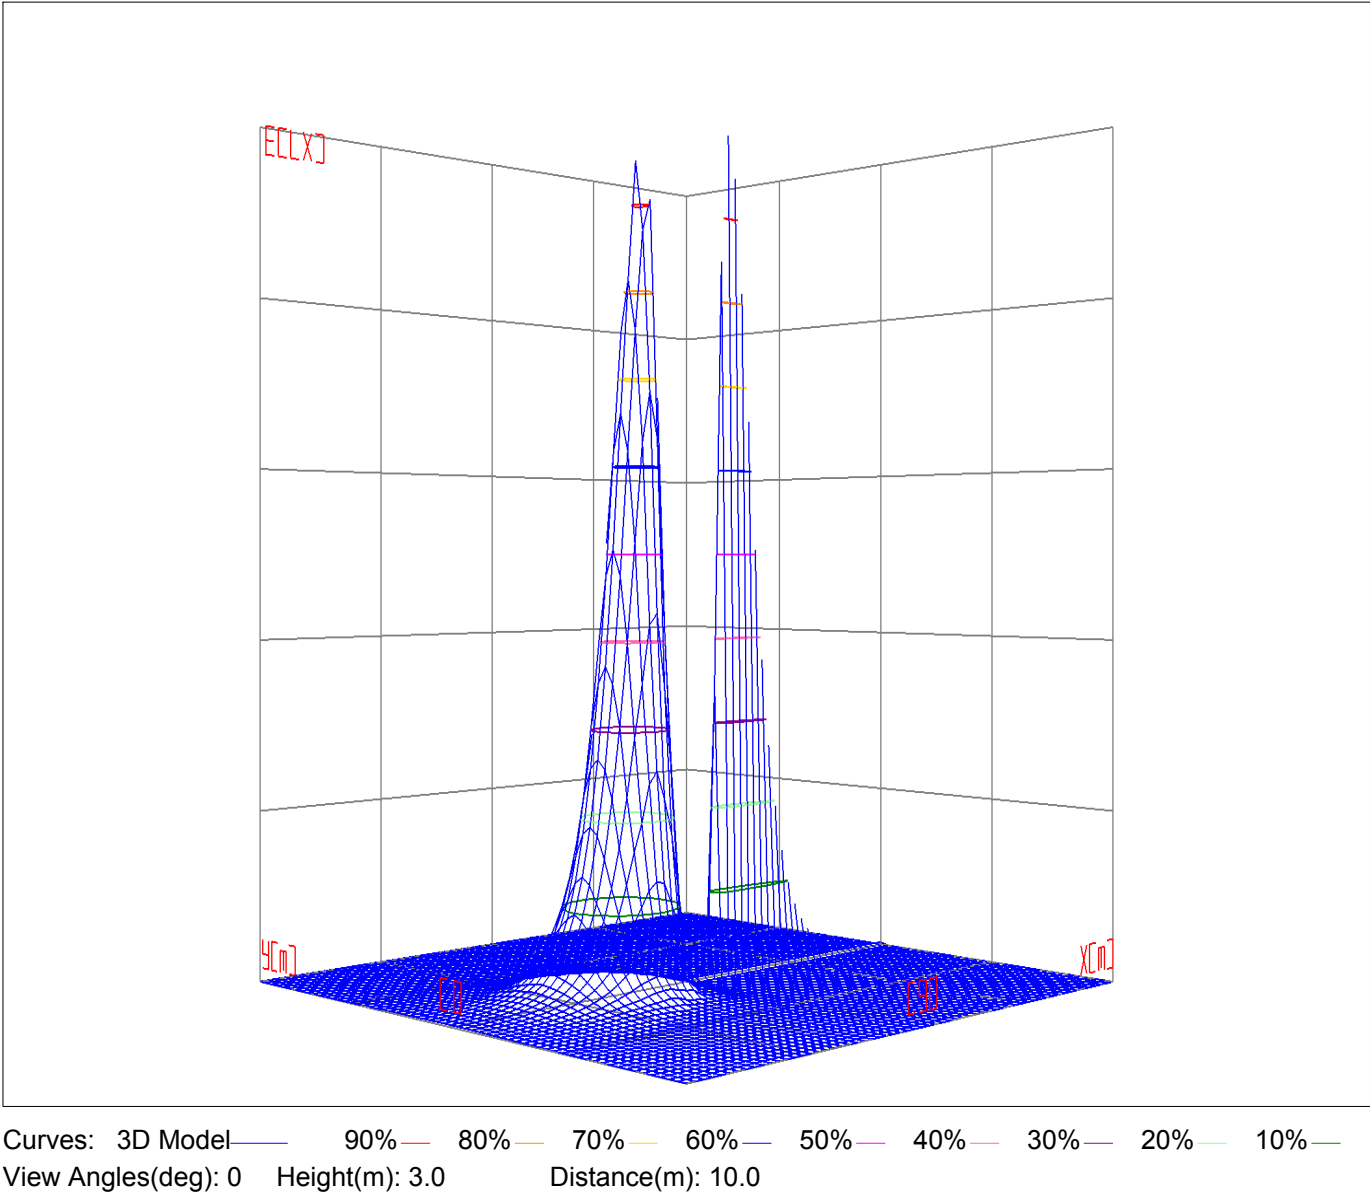

Space ISO Illuminance Diagram

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lightandgreen.com)
Manufacture: Light and Green	Test Machine: GON-2000	Test Date: 2/18/2021

Space ISO Illuminance Curve

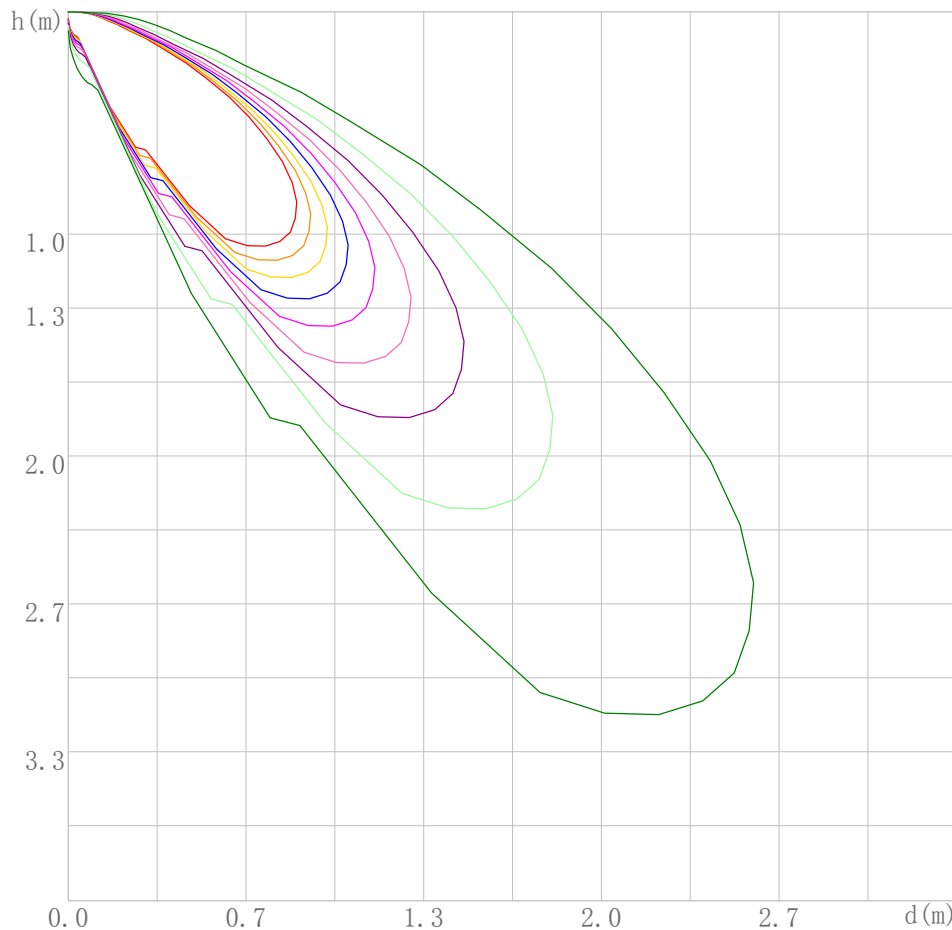

Curves:

[Unit: lx]

[EMax] =148.441

— [EMax*90%]=133.597

— [EMax*80%]=118.753

— [EMax*70%]=103.909

— [EMax*60%]=89.065

— [EMax*50%]=74.220

— [EMax*40%]=59.376

— [EMax*30%]=44.532

— [EMax*20%]=29.688

— [EMax*10%]=14.844


Space Plane Maximum Illuminance and @Angle:148.44lx,35.0deg

Plane Maximum Lighting Intensity and @Angle:292.310cd,0deg

Illuminance-Distance Diagram

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lightandgreen.com)
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

Illuminance-Distance Curve

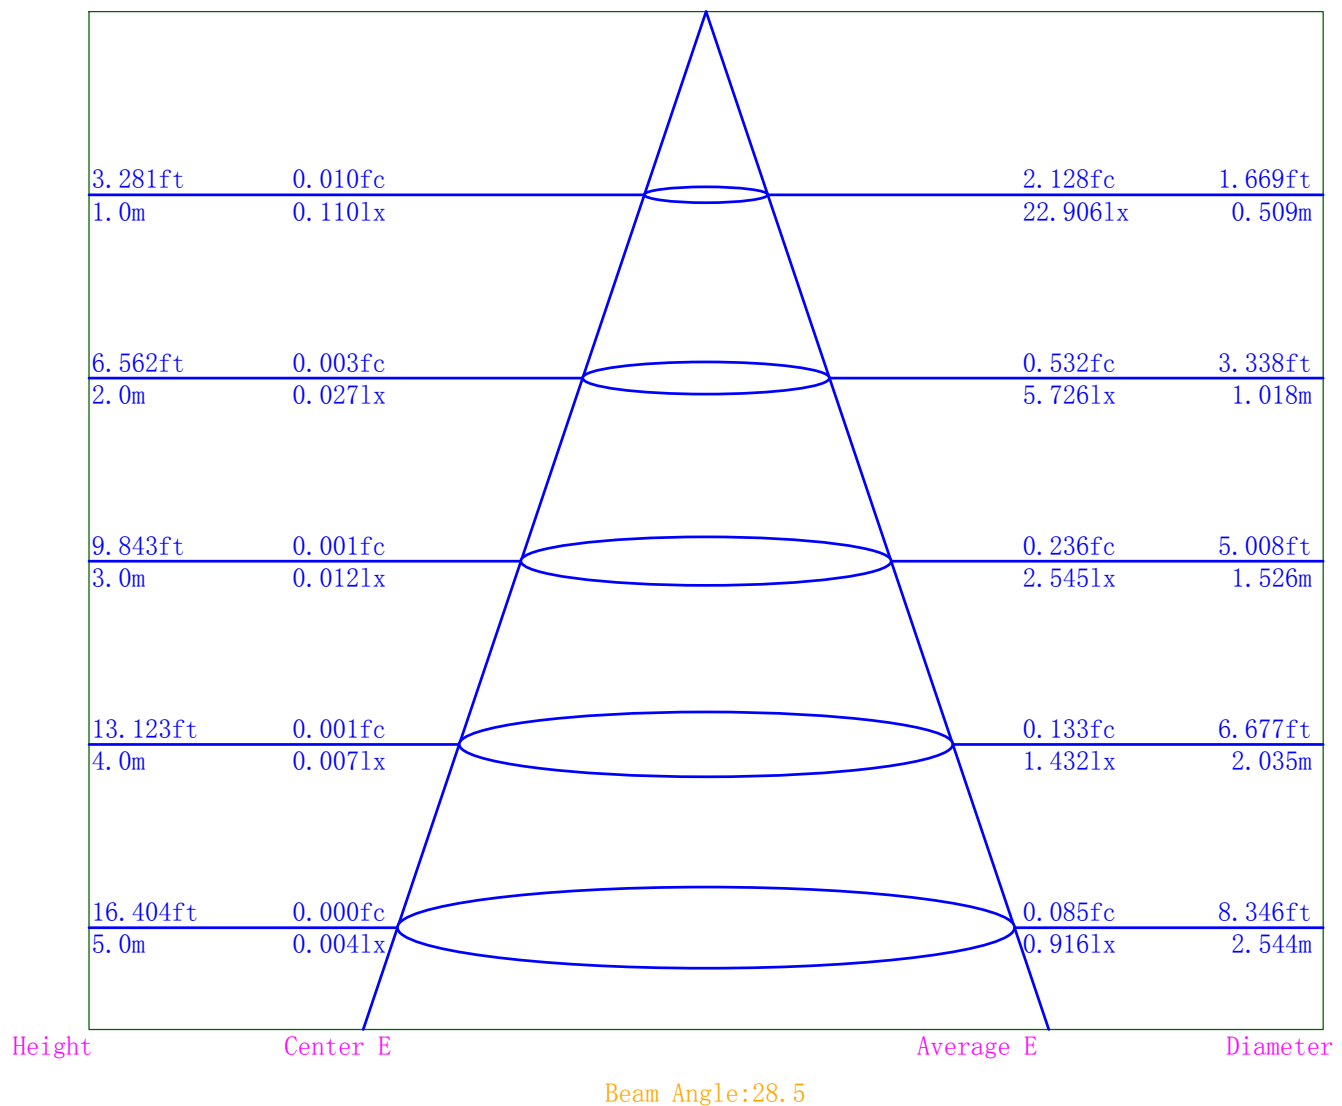

Indoor Luminance Limiting Curves

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.light-lab.com)
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	0	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0


Luminance Limiting Curve

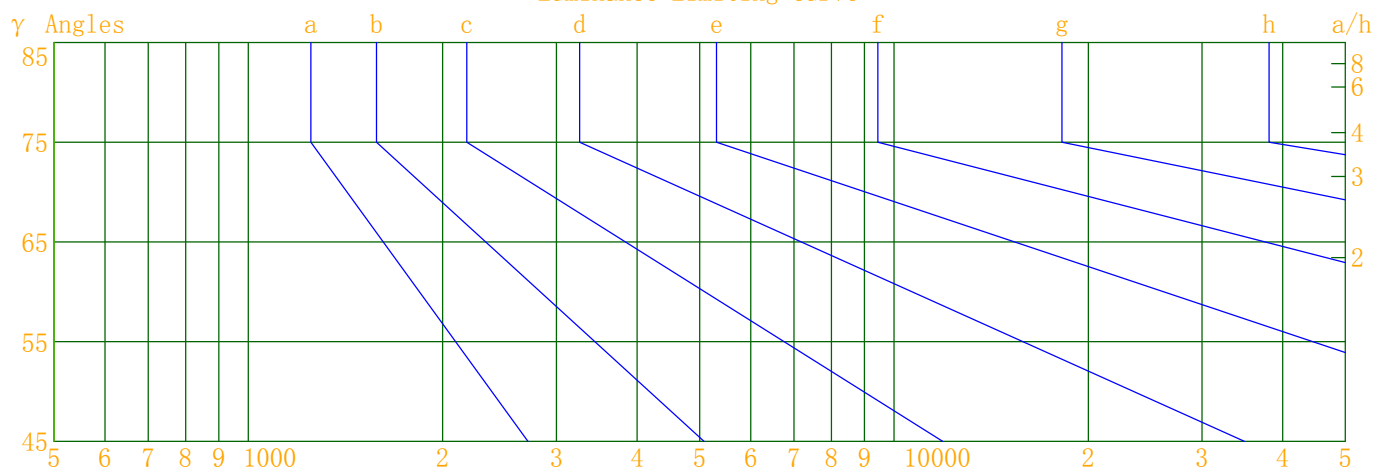

Luminous Size: Length(m)=0.000 Width(m)=0.110 Height(m)=0.170 Area(m^2)=0.000000
 Luminous Type: Without Luminous Side
 Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.light-lab.com)
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

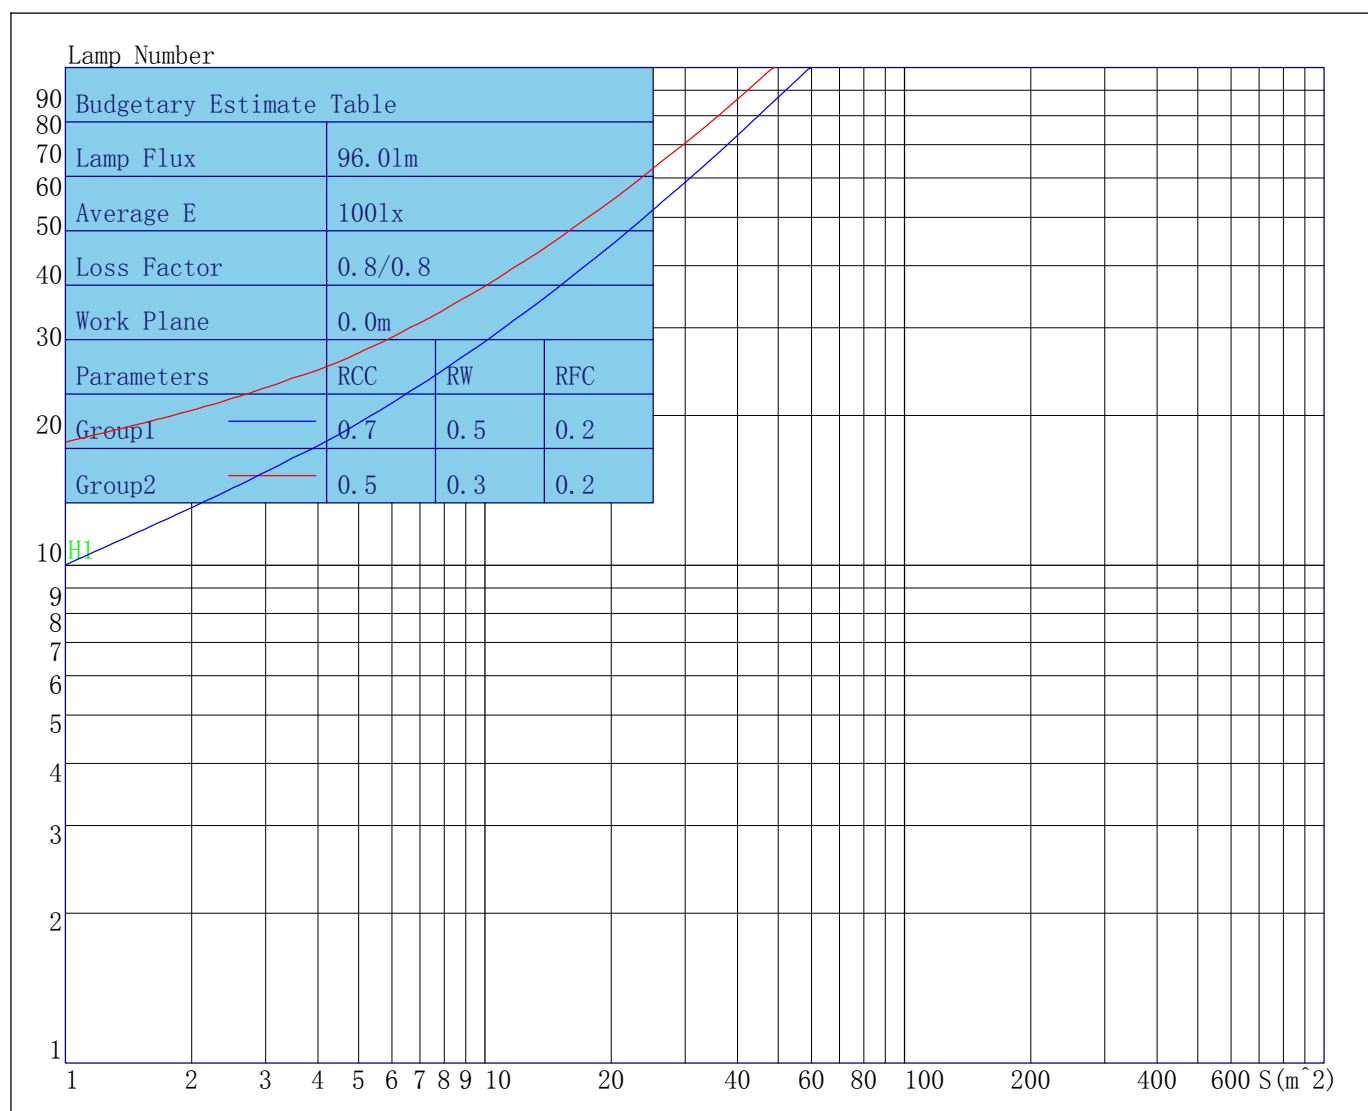

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

Indoor Coefficient of Utilization Table

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lightandgreen.com)
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	117	117	117	117	113	113	113	113	105	105	105	99	99	99	93	93	93	90
1	106	101	97	93	102	98	94	91	92	89	86	86	84	81	81	79	77	75
2	96	88	81	75	93	85	79	73	80	75	70	75	71	67	71	67	64	61
3	87	76	68	61	83	74	66	60	69	63	57	65	60	55	61	57	53	50
4	79	66	57	50	75	64	56	49	60	53	47	57	51	46	53	48	44	41
5	71	58	48	41	68	56	47	41	53	45	39	50	43	38	47	41	37	34
6	65	51	41	34	62	49	40	34	46	38	33	44	37	32	41	35	31	28
7	59	45	35	29	57	43	35	28	41	33	27	38	32	27	36	30	26	23
8	54	40	31	24	52	39	30	24	36	29	23	34	27	22	32	26	22	20
9	50	35	27	21	48	34	26	20	32	25	20	31	24	19	29	23	18	16
10	46	32	23	18	44	31	23	17	29	22	17	28	21	16	26	20	16	14

Unified Glare Rating Table

Lum. Name: LED STEP LIGHT	Lum. Catalog: LG-4005-30K	Test ID: IESNA:LM-79-08
Lamp Name:	Lamp Catalog:	Test Lab: LIGHT LABORATORY, INC. (www.lightandgreen.com)
Manufacture: Light and Green	Test Machine:GON-2000	Test Date: 2/18/2021

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	-10.3	-8.8	-9.8	-8.3	-7.7	-10.3	-8.8	-9.8	-8.3	-7.7
	-10.4	-9.1	-9.9	-8.5	-7.9	-10.4	-9.1	-9.9	-8.5	-7.9
	-10.5	-9.2	-9.9	-8.7	-8.1	-10.5	-9.2	-9.9	-8.7	-8.1
	-10.5	-9.4	-10.0	-8.8	-8.2	-10.5	-9.4	-10.0	-8.8	-8.2
	-10.6	-9.5	-10.0	-8.9	-8.2	-10.6	-9.5	-10.0	-8.9	-8.2
	-10.6	-9.5	-10.0	-9.0	-8.3	-10.6	-9.5	-10.0	-9.0	-8.3
X=4H Y=2H	-10.5	-9.2	-9.9	-8.7	-8.1	-10.5	-9.2	-9.9	-8.7	-8.1
	-10.6	-9.5	-10.0	-8.9	-8.3	-10.6	-9.5	-10.0	-8.9	-8.3
	-10.6	-9.7	-10.1	-9.1	-8.4	-10.6	-9.7	-10.1	-9.1	-8.4
	-10.7	-9.9	-10.1	-9.3	-8.6	-10.7	-9.9	-10.1	-9.3	-8.6
	-10.7	-10.0	-10.1	-9.4	-8.7	-10.7	-10.0	-10.1	-9.4	-8.7
	-10.8	-10.1	-10.1	-9.4	-8.7	-10.8	-10.1	-10.1	-9.4	-8.7
X=8H Y=4H	-10.7	-10.0	-10.1	-9.4	-8.7	-10.7	-10.0	-10.1	-9.4	-8.7
	-10.8	-10.2	-10.2	-9.5	-8.7	-10.8	-10.2	-10.2	-9.5	-8.7
	-10.9	-10.3	-10.2	-9.6	-8.9	-10.9	-10.3	-10.2	-9.6	-8.9
	-10.9	-10.4	-10.3	-9.7	-9.0	-10.9	-10.4	-10.3	-9.7	-9.0
X=12H Y=4H	-10.8	-10.1	-10.1	-9.4	-8.7	-10.8	-10.1	-10.1	-9.4	-8.7
	-10.9	-10.3	-10.2	-9.7	-8.9	-10.9	-10.3	-10.2	-9.7	-8.9
	-10.9	-10.4	-10.3	-9.7	-9.0	-10.9	-10.4	-10.3	-9.7	-9.0
Variations with the objverver position at spacings										
S=1.0H	0.0/0.0					0.0/0.0				
S=1.5H	0.0/0.0					0.0/0.0				
S=2.0H	0.0/0.0					0.0/0.0				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	0.0					0.0				

to the CIE Pub. 117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0	C50.0	C55.0
γ 0.0	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11
γ 2.5	0.39	0.38	0.38	0.37	0.36	0.35	0.34	0.33	0.31	0.29	0.28	0.26
γ 5.0	0.66	0.66	0.66	0.64	0.62	0.60	0.57	0.55	0.51	0.48	0.44	0.40
γ 7.5	1.00	0.99	0.98	0.96	0.93	0.89	0.85	0.80	0.74	0.67	0.61	0.55
γ 10.0	1.33	1.33	1.31	1.29	1.25	1.21	1.15	1.08	1.01	0.92	0.83	0.73
γ 12.5	1.61	1.61	1.59	1.56	1.53	1.48	1.43	1.36	1.27	1.16	1.05	0.93
γ 15.0	1.78	1.78	1.77	1.75	1.72	1.68	1.64	1.58	1.49	1.39	1.26	1.12
γ 17.5	2.13	2.13	2.08	2.03	1.96	1.88	1.79	1.73	1.67	1.58	1.45	1.31
γ 20.0	28.75	26.78	21.96	16.65	10.17	4.79	2.01	1.91	1.82	1.73	1.62	1.45
γ 22.5	62.84	61.17	54.44	44.95	31.71	15.74	6.99	3.31	1.98	1.88	1.77	1.61
γ 25.0	69.12	73.85	76.29	68.94	58.53	44.28	24.03	6.32	2.72	2.02	1.92	1.76
γ 27.5	145.41	137.99	125.51	98.79	77.80	60.49	41.29	20.52	6.41	2.24	2.04	1.91
γ 30.0	214.46	199.20	172.80	128.22	96.40	75.08	55.15	32.99	9.46	3.58	2.19	2.03
γ 32.5	246.49	239.15	218.75	173.92	121.41	92.55	64.73	42.53	19.76	3.88	2.35	2.16
γ 35.0	270.06	263.06	244.12	214.58	151.68	104.32	71.09	46.99	23.42	8.51	2.58	2.28
γ 37.5	285.78	278.28	256.60	220.39	154.02	114.57	80.09	49.42	27.09	13.61	4.43	2.41
γ 40.0	292.31	281.26	260.90	230.68	185.42	121.68	80.45	48.11	27.60	13.45	5.96	2.55
γ 42.5	287.46	279.69	258.72	226.02	177.32	125.16	77.66	46.22	24.99	14.88	5.93	2.69
γ 45.0	277.19	269.27	246.04	212.21	156.20	119.78	75.90	41.55	22.94	12.23	7.29	2.81
γ 47.5	256.30	248.85	224.85	192.10	134.54	113.29	69.11	38.80	19.83	12.88	6.07	2.93
γ 50.0	227.94	219.38	199.78	163.83	122.58	95.66	55.24	32.72	18.78	11.72	6.92	3.07
γ 52.5	193.47	188.07	172.05	135.05	109.93	76.80	45.60	26.69	14.54	8.54	3.56	3.20
γ 55.0	160.08	155.07	136.05	109.12	91.91	60.08	34.98	21.72	14.40	6.71	3.62	3.32
γ 57.5	127.59	120.65	100.06	89.80	67.01	45.45	28.57	18.10	12.71	6.64	3.73	3.43
γ 60.0	95.11	87.53	79.65	68.16	48.72	33.12	20.54	14.26	9.43	4.29	3.85	3.54
γ 62.5	71.43	65.76	59.08	47.84	35.18	24.18	16.11	13.43	7.84	4.38	3.96	3.63
γ 65.0	47.75	45.09	41.25	33.15	24.79	18.21	14.36	11.81	6.12	4.41	4.07	3.72
γ 67.5	34.61	32.20	27.52	23.40	17.63	14.52	13.33	7.75	5.04	4.50	4.18	3.79
γ 70.0	21.48	21.70	20.05	16.32	14.28	11.97	9.12	6.20	4.96	4.60	4.28	3.85
γ 72.5	16.78	16.12	14.06	12.85	11.23	9.25	7.19	5.61	4.98	4.71	4.35	3.90
γ 75.0	12.09	12.38	11.66	10.52	9.32	7.81	6.34	5.40	5.03	4.76	4.41	3.94
γ 77.5	10.53	10.31	9.78	8.97	8.02	6.86	5.92	5.39	5.10	4.82	4.45	3.98
γ 80.0	8.98	9.01	8.53	7.94	7.12	6.35	5.77	5.42	5.17	4.88	4.47	3.99
γ 82.5	8.10	8.00	7.68	7.15	6.58	6.11	5.72	5.47	5.22	4.91	4.49	3.99
γ 85.0	7.23	7.25	7.04	6.70	6.36	6.01	5.75	5.53	5.26	4.91	4.49	3.98
γ 87.5	6.94	6.89	6.75	6.51	6.24	6.00	5.80	5.56	5.27	4.90	4.49	3.96
γ 90.0	6.66	6.71	6.57	6.36	6.20	6.04	5.83	5.57	5.27	4.89	4.45	3.93
γ 95.0	6.32	6.44	6.48	6.39	6.25	6.06	5.81	5.54	5.20	4.81	4.37	3.87
γ 100.0	6.29	6.30	6.36	6.32	6.18	5.97	5.73	5.42	5.09	4.70	4.27	3.77
γ 105.0	6.15	6.15	6.13	6.10	6.00	5.80	5.55	5.26	4.92	4.53	4.11	3.63
γ 110.0	5.94	5.92	5.87	5.81	5.70	5.54	5.31	5.03	4.72	4.35	3.93	3.48
γ 115.0	5.66	5.63	5.59	5.51	5.38	5.22	5.02	4.76	4.46	4.12	3.71	3.29
γ 120.0	5.34	5.33	5.26	5.17	5.05	4.90	4.69	4.45	4.17	3.84	3.45	3.08
γ 125.0	4.96	4.96	4.90	4.81	4.70	4.53	4.34	4.10	3.84	3.52	3.18	2.84
γ 130.0	4.58	4.56	4.51	4.42	4.30	4.15	3.97	3.74	3.47	3.19	2.89	2.58
γ 135.0	4.16	4.14	4.09	4.01	3.89	3.74	3.57	3.34	3.11	2.85	2.59	2.31
γ 140.0	3.70	3.68	3.64	3.56	3.44	3.30	3.13	2.94	2.75	2.53	2.28	2.02

Candela Tabulation - (Cont.)

V/H	C0.0	C5.0	C10.0	C15.0	C20.0	C25.0	C30.0	C35.0	C40.0	C45.0	C50.0	C55.0
γ 145.0	3.18	3.18	3.14	3.07	2.98	2.86	2.72	2.56	2.38	2.18	1.97	1.75
γ 150.0	2.69	2.69	2.66	2.60	2.52	2.42	2.31	2.17	2.01	1.85	1.67	1.47
γ 155.0	2.20	2.20	2.18	2.13	2.05	1.96	1.88	1.79	1.65	1.50	1.36	1.21
γ 160.0	1.71	1.71	1.68	1.65	1.60	1.54	1.46	1.38	1.29	1.18	1.05	0.93
γ 165.0	1.26	1.26	1.23	1.21	1.17	1.12	1.07	1.00	0.93	0.85	0.77	0.68
γ 170.0	0.80	0.80	0.79	0.77	0.75	0.72	0.69	0.65	0.61	0.56	0.50	0.44
γ 175.0	0.38	0.38	0.38	0.37	0.37	0.36	0.35	0.33	0.32	0.30	0.28	0.26
γ 180.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
V/H	C60.0	C65.0	C70.0	C75.0	C80.0	C85.0	C90.0	C95.0	C100.0	C105.0	C110.0	C115.0
γ 0.0	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11
γ 2.5	0.24	0.21	0.19	0.17	0.14	0.12	0.10	0.00	0.00	0.00	0.00	0.00
γ 5.0	0.36	0.32	0.27	0.23	0.18	0.14	0.09	0.00	0.00	0.00	0.00	0.00
γ 7.5	0.49	0.43	0.37	0.30	0.23	0.16	0.09	0.00	0.00	0.00	0.00	0.00
γ 10.0	0.63	0.54	0.46	0.37	0.28	0.18	0.09	0.00	0.00	0.00	0.00	0.00
γ 12.5	0.80	0.66	0.54	0.43	0.32	0.21	0.10	0.00	0.00	0.00	0.00	0.00
γ 15.0	0.96	0.80	0.63	0.50	0.37	0.24	0.11	0.00	0.00	0.00	0.00	0.00
γ 17.5	1.12	0.92	0.72	0.53	0.39	0.25	0.11	0.00	0.00	0.00	0.00	0.00
γ 20.0	1.25	1.03	0.80	0.56	0.41	0.25	0.11	0.00	0.00	0.00	0.00	0.00
γ 22.5	1.39	1.14	0.88	0.61	0.42	0.26	0.11	0.00	0.00	0.00	0.00	0.00
γ 25.0	1.53	1.24	0.95	0.66	0.42	0.27	0.12	0.00	0.00	0.00	0.00	0.00
γ 27.5	1.67	1.36	1.03	0.71	0.42	0.27	0.12	0.00	0.00	0.00	0.00	0.00
γ 30.0	1.81	1.49	1.10	0.75	0.41	0.26	0.12	0.00	0.00	0.00	0.00	0.00
γ 32.5	1.93	1.61	1.19	0.80	0.43	0.26	0.13	0.00	0.00	0.00	0.00	0.00
γ 35.0	2.06	1.72	1.27	0.84	0.45	0.26	0.14	0.00	0.00	0.00	0.00	0.00
γ 37.5	2.18	1.85	1.36	0.88	0.48	0.26	0.16	0.00	0.00	0.00	0.00	0.00
γ 40.0	2.29	1.93	1.45	0.92	0.50	0.26	0.18	0.00	0.00	0.00	0.00	0.00
γ 42.5	2.42	2.03	1.54	0.97	0.53	0.27	0.20	0.00	0.00	0.00	0.00	0.00
γ 45.0	2.54	2.13	1.63	1.04	0.56	0.28	0.23	0.00	0.00	0.00	0.00	0.00
γ 47.5	2.64	2.24	1.72	1.12	0.61	0.29	0.25	0.00	0.00	0.00	0.00	0.00
γ 50.0	2.75	2.33	1.81	1.19	0.66	0.30	0.26	0.00	0.00	0.00	0.00	0.00
γ 52.5	2.86	2.41	1.89	1.27	0.70	0.32	0.28	0.00	0.00	0.00	0.00	0.00
γ 55.0	2.96	2.50	1.97	1.35	0.74	0.34	0.30	0.00	0.00	0.00	0.00	0.00
γ 57.5	3.06	2.59	2.04	1.42	0.79	0.37	0.32	0.00	0.00	0.00	0.00	0.00
γ 60.0	3.14	2.67	2.11	1.48	0.83	0.39	0.35	0.00	0.00	0.00	0.00	0.00
γ 62.5	3.22	2.73	2.17	1.54	0.89	0.43	0.36	0.00	0.00	0.00	0.00	0.00
γ 65.0	3.29	2.80	2.22	1.60	0.94	0.48	0.37	0.00	0.00	0.00	0.00	0.00
γ 67.5	3.35	2.85	2.27	1.64	0.99	0.51	0.39	0.00	0.00	0.00	0.00	0.00
γ 70.0	3.39	2.88	2.32	1.69	1.03	0.55	0.42	0.00	0.00	0.00	0.00	0.00
γ 72.5	3.43	2.92	2.36	1.73	1.07	0.59	0.42	0.00	0.00	0.00	0.00	0.00
γ 75.0	3.46	2.94	2.38	1.76	1.11	0.62	0.42	0.00	0.00	0.00	0.00	0.00
γ 77.5	3.48	2.96	2.40	1.78	1.14	0.65	0.43	0.00	0.00	0.00	0.00	0.00
γ 80.0	3.49	2.97	2.41	1.79	1.17	0.68	0.44	0.00	0.00	0.00	0.00	0.00
γ 82.5	3.49	2.97	2.41	1.81	1.20	0.69	0.43	0.00	0.00	0.00	0.00	0.00
γ 85.0	3.47	2.96	2.41	1.83	1.22	0.70	0.42	0.00	0.00	0.00	0.00	0.00
γ 87.5	3.46	2.95	2.39	1.83	1.22	0.71	0.42	0.00	0.00	0.00	0.00	0.00
γ 90.0	3.44	2.92	2.38	1.82	1.22	0.72	0.42	0.00	0.00	0.00	0.00	0.00
γ 95.0	3.37	2.87	2.34	1.80	1.24	0.73	0.42	0.00	0.00	0.00	0.00	0.00

[illegible]

[illegible]

V/H	C180.0
γ 0.0	0.11
γ 2.5	0.00
γ 5.0	0.00
γ 7.5	0.00
γ 10.0	0.00
γ 12.5	0.00
γ 15.0	0.00
γ 17.5	0.00
γ 20.0	0.00
γ 22.5	0.00
γ 25.0	0.00
γ 27.5	0.00
γ 30.0	0.00
γ 32.5	0.00
γ 35.0	0.00
γ 37.5	0.00
γ 40.0	0.00
γ 42.5	0.00
γ 45.0	0.00
γ 47.5	0.00

Candela Tabulation - (Cont.)

V/H	C180.0
γ 50.0	0.00
γ 52.5	0.00
γ 55.0	0.00
γ 57.5	0.00
γ 60.0	0.00
γ 62.5	0.00
γ 65.0	0.00
γ 67.5	0.00
γ 70.0	0.00
γ 72.5	0.00
γ 75.0	0.00
γ 77.5	0.00
γ 80.0	0.00
γ 82.5	0.00
γ 85.0	0.00
γ 87.5	0.00
γ 90.0	0.00
γ 95.0	0.00
γ 100.0	0.00
γ 105.0	0.00
γ 110.0	0.00
γ 115.0	0.00
γ 120.0	0.00
γ 125.0	0.00
γ 130.0	0.00
γ 135.0	0.00
γ 140.0	0.00
γ 145.0	0.00
γ 150.0	0.00
γ 155.0	0.00
γ 160.0	0.00
γ 165.0	0.00
γ 170.0	0.00
γ 175.0	0.00
γ 180.0	0.00
