



LG-9111A

4" Adjustable Square Recessed Downlight LED- Triple

| | |
|------------------|---------------|
| Project Address: | Project Name: |
| Fixture Type: | Quantity: |



Trim

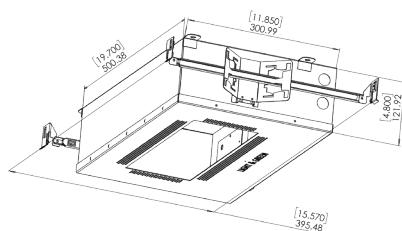

Shallow Housing

HARMONY

Trimless Recessed Downlight LED - 1x3 Square
Harmony downlights are solid plaster mud-in lighting solutions made from gypsum. Our plaster trims provide a **TRUELY** seamless and trimless lighting application. Our innovative monolithic design eliminates the need for touch ups after future maintenance. Our flangeless downlights are paintable, texturable, and manufactured at a level 5 plaster finish.

Our LED modules are high performance, low power, and provide outstanding reliability and color quality/consistency. 2700K, 3000K, 3500K, and 4000K color temperatures are available with 95+ CRI. Also available in Warm Dim & Tunable White.

- Flicker free
- Dimming performance below 0.01%
- Life Rated for 50,000 hours at 70% lumen maintenance



Quick Info

(Ordering guide can be found on page 5)

| Application | |
|---|--|
| New Construction / Remodeling | |
| Delivered Lumens | Color Quality |
| 3x1250 lm (13W) / 3x1800 lm (17W) | 95+ CRI |
| Color Temperature | Warm Dim Option |
| 2700K 3000K 3500K 4000K | 1800K-3000K 940 lm (13W) / 1300 lm (17W) |
| | Tunable White Option |
| | 2700K-6500K 910 lm (13W) |
| Input Voltage | Beam Spreads |
| 120V / 120-277V | 15 ° 24 ° 38 ° (standard) 60 ° |
| Trims | Module Ratings |
| Gypsum Flangeless (seamless) | Damp Location Rated |
| Housing Ratings | Adjustability |
| IC Rated / Air Tight / CCEA | 30 ° |
| Dimming | |
| <ul style="list-style-type: none"> • TRIAC/ELV (120V only) • 0-10 | <ul style="list-style-type: none"> • DALI • Lutron EcoSystem |

LG-9111A

4" Adjustable Square
Recessed Downlight LED- Triple

| | |
|------------------|---------------|
| Project Address: | Project Name: |
| Fixture Type: | Quantity: |

Optional Optics

BEAM SPREAD



15°



24°



38°(standard)



60°

LENS OPTICAL



Soft Focus




Frosted



Linear Spread






Prismatic



Honeycomb Black

LENS HOLDER



Conical



Cylinder 1"



Cylinder 2"




Cylinder 3"

LG-9111A

4" Adjustable Square Recessed Downlight LED- Triple

| | |
|------------------|---------------|
| Project Address: | Project Name: |
| Fixture Type: | Quantity: |

1004/3

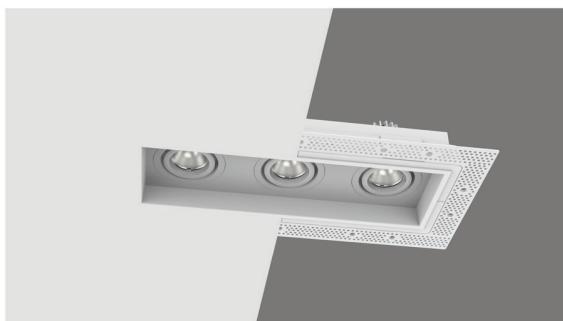

Universal Shallow Housing

INPUT 120V / 120-277V



HOUSING RATING - UL, cUL, IC-rated, Air Tight, CCEA (Chicago Platinum)

DRIVER - In the housing

- TRIAC/ELV less than 0.01% standard (120V only)
- 0-10 less than 0.1%
- Lutron Hi-lume Premier 0.1% Eco System LED driver with soft-on, fade-to-black dimming technology
- DALI Down to 0.5%

MOUNTING - Shallow housing includes universal mounting brackets and hanger bars

CEILING INSTALLATION

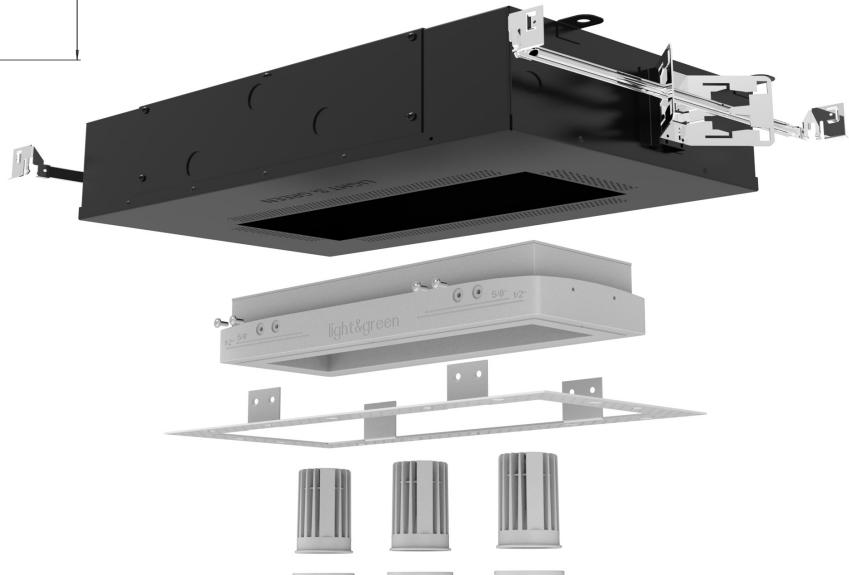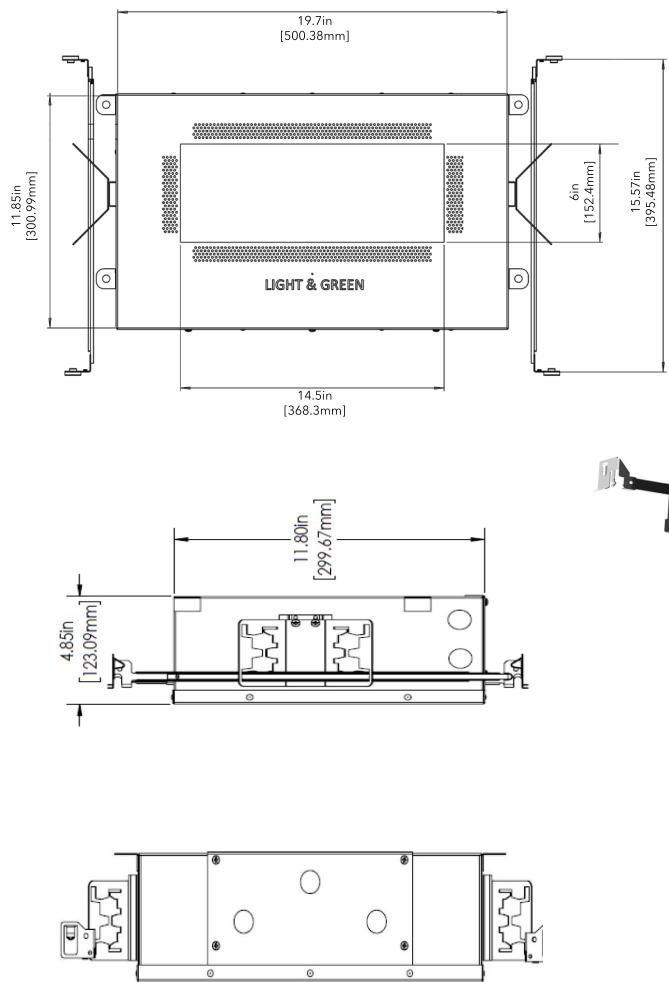

LG-9111A

4" Adjustable Square Recessed Downlight LED- Triple


| | |
|------------------|---------------|
| Project Address: | Project Name: |
| Fixture Type: | Quantity: |

Specifications

| | | | | | |
|-------------------|--|--|--|--|--|
| LED TYPE | CL2-13W CITIZEN | CL2-17W CITIZEN | Warm Dim CL2-13WD BRIGLUXE | Warm Dim CL2-17WD BRIGLUXE | Tunable White CL2-13TW BRIGLUXE |
| DELIVERED LUMENS | 3 x 1250 | 3 x 1800 | 3 x 940 | 3 x 1300 | 3 x 910 |
| WATTS | 3 x 13W | 3 x 17W | 3 x 13W | 3 x 17W | 3 x 13W |
| CRI | 95+ | | | | |
| COLOR TEMPERATURE | 2700K / 3000K / 35000K / 4000K | | 1800K-3000K | 1800K-3000K | 2700K-6500K |
| VOLTAGE | | | 120V / 120-277V | | |
| DIMMING | <ul style="list-style-type: none"> • TRIAC/ELV (Down to > 0.01%) - 120V only • 0 -10 (Down to > 0.1%) • Lutron (Hi-lume Premier 0.1% Eco System LED Driver with Soft-on, Fade-to-black dimming technology) • DALI (Down to 0.5%) | | | | • 0 -10 v (Down to > 5%) |
| POWER SUPPLY x 3 | Constant current driver 36Vdc/350mA | Constant current driver 36Vdc/450mA | Constant current driver 36Vdc/350mA | Constant current driver 36Vdc/450mA | Constant current driver 36Vdc/350mA |
| BEAM SPREAD | 15°/24°/38°/60° | | | | |
| OPTICS | Soft Focus / Frosted / Linear Spread / Prismatic | | | | |
| DIFFUSERS | Honeycomb | | | | |
| ADJUSTABILITY | Adjustable | | | | |
| HOUSING | IC RATED / AIR TIGHT / CCEA (CHICAGO PLENUM) / DAMP RATED | | | | |
| FINISH | GYPSUM/SEAMLESS | | | | |

Product Features

- Revolutionary flush mounted, trimless & seamless design
- Made out of Environmentally Friendly Plaster Materials
- Our plaster fixture can be painted using your standard paint colors
- Energy efficient LED light engines
- Versatile field changeable optics
- Dimmable with a variety of commonly used drivers
- Fixtures can be used with all Smart House Systems such as Lutron, Vantage, Control 4, Crestron and others
- Easy installation for new construction and remodel applications
- Damp Location rated
- For best results, do not paint the inside of the fixture. If painting is necessary we recommend using a spraying technique. Painting with a brush will reveal brush strokes when illuminated.



LG-9111A

4" Adjustable Square Recessed Downlight LED- Triple

| | |
|------------------|---------------|
| Project Address: | Project Name: |
| Fixture Type: | Quantity: |

Ordering Guide

PRODUCT CODE

LG - 9111A

Example Number

LG-9111A N 13W 30K T

Optional: 15 SF CY3

REQUIRED OPTIONS

HOUSING

S - Shallow (1004/3)

Order Number

LG-9111A _____

Optional: _____

LED OPTIONS*

*Includes 95+ CRI, 38 degree beam spread

OUTPUT

- 13W - 1250 lm (13W)
- 17W - 1800 lm (17W)

COLOR TEMPERATURE

- 27K - 2700K
- 30K - 3000K
- 35K - 3500K
- 40K - 4000K

OR

WARM DIM

- 13WD - 1800K-3000K 940 lm (13W)
- 17WD - 1800K-3000K 1300 lm (17W)
(Compatible with shallow housing only)

TUNABLE WHITE

- 13TW - 2700K-6500K 910 lm (13W)
(only compatible with 0-10)*

*Please see installation guide for tunable white wiring diagram

DIMMING OPTION*

- T - Triac/ELV (Less than 0.01%, compatible with 120V only)
- D - DALI (Down to 0.5%)
- ECO - (Hi - lume Premier 0.1% Eco System LED Driver with Soft-on, Fade-to-black dimming technology)
- 0 - 10 - (Less than 0.1%)
- *For DMX please contact Light and Green directly.

OPTIONAL OPTIC OPTIONS

BEAM SPREAD

- 15°
- 24°
- 38° (Included)
- 60°

LENS OPTICAL

- HBL - Honeycomb
- SF - Soft Focus
- FR - Frosted
- LS - Linear Spread
- PR - Prismatic

LENS HOLDER

- CY1-WH - Cylinder 1" White
- CY2-WH - Cylinder 2" White
- CY3-WH - Cylinder 3" White
- CO-WH - Conical 1" White
- CY1-BL - Cylinder 1" Black
- CY2-BL - Cylinder 2" Black
- CY3-BL - Cylinder 3" Black
- CO-BL - Conical 1" Black