



# LG-9013A\*

## 4" Adjustable Round Recessed Downlight LED- Single



Trim

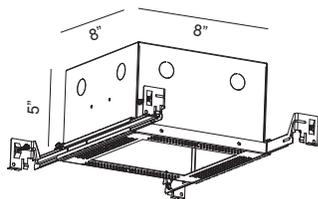

Shallow Housing

Project Address:	Project Name:
Fixture Type:	Quantity:

## HARMONY

The Harmony Trimless Recessed Downlights, made from solid gypsum, provide a seamless, trimless installation with a monolithic design that requires no touch-ups after maintenance. The flangeless fixtures feature a Level 5 plaster finish and are paintable and texturable for a perfect fit with any interior style.

### LED Module Features:

- High-performance, low-power LEDs ensure reliability and color consistency.
- Available in 2700K, 3000K, 3500K, and 4000K with a CRI of 95+ for accurate color rendering.
- Warm Dim and Tunable White options offer added design flexibility.

The Harmony Series delivers sleek aesthetics and advanced lighting technology for a modern, flawless finish.

- Flicker free
- Dimming performance with Triac/ELV below 0.01%
- Life Rated for 50,000 hours at 70% lumen maintenance

## Quick Info (Ordering guide can be found on page 2)



<b>Application</b> New Construction / Remodeling		
<b>Delivered Lumens</b> 1250 lm (13W) / 1610 lm (18W) - (3000K)		<b>Color Quality</b> 95+ CRI
<b>Color Temperature</b> 2700K 3000K 3500K 4000K	<b>Warm Dim Option</b> 1800K-3000K 940 lm (13W) / 1300 lm (18W)	<b>Beam Spreads</b> 15 ° 24 ° 38 ° (standard) 60 °
<b>Tunable White Option</b> 2700K-6500K 910 lm (13W)		
<b>Input Voltage</b> 120V / 120-277V		<b>Module Ratings</b> Wet location listed
<b>Trims</b> Gypsum Flangeless (seamless)		<b>Adjustability</b> 35°
<b>Housing Ratings</b> IC Rated / Air Tight / CCEA		
<b>Dimming</b> <ul style="list-style-type: none"> <li>• TRIAC/ELV (120V only)</li> <li>• 0-10</li> <li>• DALI 2(DT6/DT8)</li> <li>• Lutron EcoSystem</li> <li>• DMX dimming, &gt;0.01% for Tunable White</li> </ul>		

# LG-9013A\*

## 4" Adjustable Round Recessed Downlight LED- Single

Project Address:	Project Name:
Fixture Type:	Quantity:

### Ordering Guide

#### Order Number

(\*) Required fields

LG-9013A\* SN - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
\*Housing \*W/CCT/LM \*Dimming Optional Optional

#### Example Formula

LG-9013A\* SN - 13W27K - T - N/A - SF  
\*Housing \*W/CCT/LM \*Dimming Beam Spread Lens Optical



#### Required Options

Trim Page #1 LG-9013A*		Housing Page #4 SN		Wattage/CCT/Lumens Page #5		Dimming Page #5	
LG-9013A*	4" Non-Adjustable Round	SN	Universal Shallow Housing (1004-SQ)	13W27K	13 Watts, 2700K, 1200lm	T	TRIAC/ELV Dimming, < 0.01%, compatible with 120V only
				13W30K	13 Watts, 3000K, 1250lm	D2	DT6/DT8, Intelligent LED Driver For single color and Tunable White < 0.01%
				13W35K	13 Watts, 3500K, 1300lm	ECO	Hi-Lume Premier 0.1% Eco System LED Driver with Soft-on, Fade-to-black dimming tech
				13W40K	13 Watts, 4000K, 1350lm	0-10	0-10V Dimming, > 0.01%
				13WD	13 Watts, <b>Warm Dim</b> , 1800K-3000K, 940lm	DMX	DMX dimming, > 0.01% for Tunable White
				13TW	13 Watts, <b>Tunable Dim</b> , 2700K-6500K, 910lm (Compatible with Dual Channel 0-10V & DMX dimming only)	2-10	Dual Channel 0-10V Dimming for Tunable White
				18W27K	18 Watts, 2700K, 1568lm		
				18W30K	18 Watts, 3000K, 1610lm		
				18W35K	18 Watts, 3500K, 1680lm		
				18W40K	18 Watts, 4000K, 1751lm		
				18WD	18 Watts, <b>Warm Dim</b> , 1800K-3000K, 1300lm		

\*Includes 95+ CRI, 38 degrees beam spread

#### Optional Optics

Beam Spread Page #3		Lens Optical Page #3	
15	15° Ultra Narrow	HBL	Honeycomb Diffuser
24	24° Narrow Spot	SF	Soft Focus Lens
60	60° Wide Flood	FR	Froster Lens
	*38° Flood (Included with every purchase)	LS	Linear Spread Lens
		PR	Prismatic Lens

# LG-9013A\*

4" Adjustable Round  
Recessed Downlight LED- Single

Project Address:	Project Name:
Fixture Type:	Quantity:

## Optional Optics

### LENS OPTICAL



Soft Focus




Frosted



Linear Spread






Prismatic



Honeycomb Black

# 1004-SQ

## Universal Housing Shallow

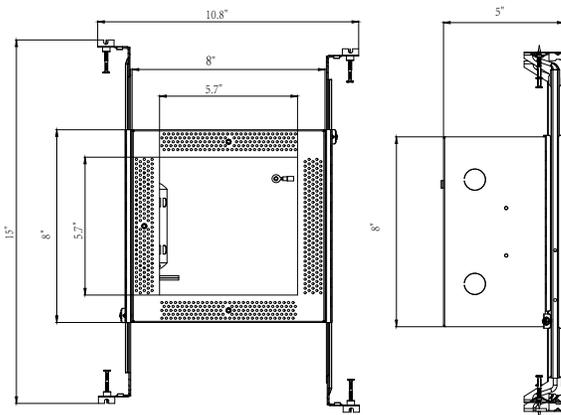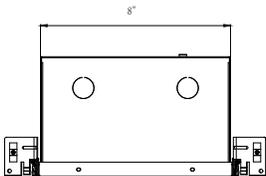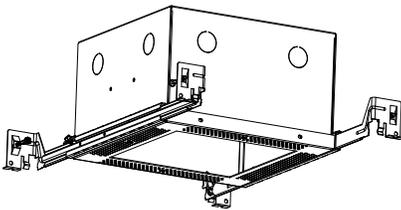

Project Address:	Project Name:
Fixture Type:	Quantity:

### Universal Housing

**INPUT** 120V / 120-277V

**HOUSING RATING** - UL, cUL, IC rated, Air Tight, CCEA (Chicago Platinum)


**DRIVER** - In the housing

- TRIAC/ELV < 0.01% Standard (120V only)
- 0-10V Dimming, > 0.01%
- Dual Channel 0-10V Dimming for Tunable White
- Lutron Hi-lume Premier 0.1% Eco System LED Driver with soft-on, fade-to-black dimming technology
- DALI 2 Dimming, > 0.01%

**DRIVER** - Remote

- DMX dimming, >0.01% for Tunable White

**MOUNTING** - Shallow housing includes mounting brackets

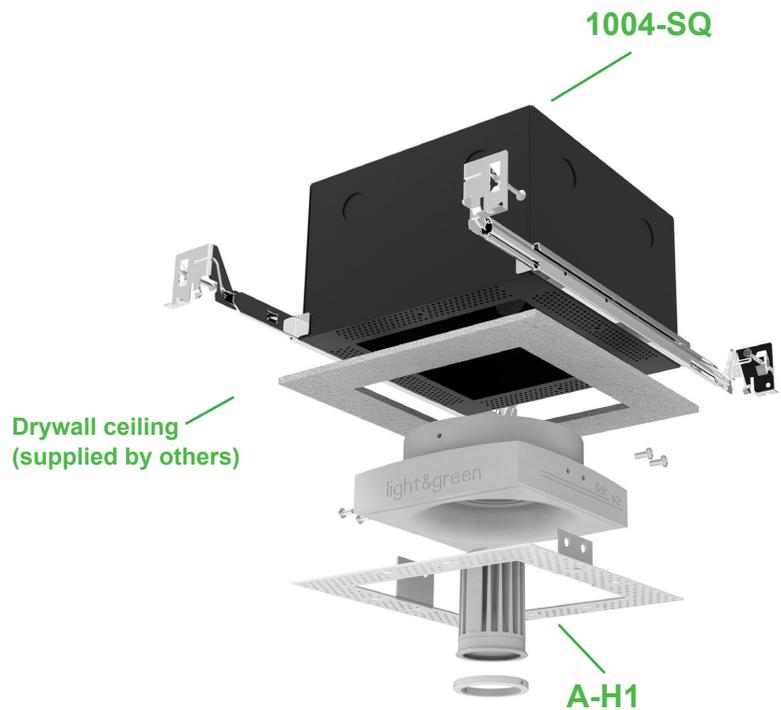

# LG-9013A\*

## 4" Adjustable Round Recessed Downlight LED- Single

Project Address:	Project Name:
Fixture Type:	Quantity:

### Specifications

LED TYPE	CL2-13W CITIZEN	CL2-18W CITIZEN	Warm Dim CL2-13WD BRIGLUXE	Warm Dim CL2-18WD BRIGLUXE	Tunable White CL2-13TW BRIGLUXE
DELIVERED LUMENS	1250lm (3000K)	1610lm (3000K)	940lm	1300lm	910lm
SDCM	2-STEP	2-STEP	3-STEP	3-STEP	3-STEP
WATTS	13W	18W	13W	18W	13W
CRI	95+				
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K		1800K-3000K	1800K-3000K	2700K-6500K
VOLTAGE	120V / 120-277V				
DIMMING	<ul style="list-style-type: none"> <li>• TRIAC/ELV (Down to &lt; 0.01%) - 120V only</li> <li>• 0 -10</li> <li>• Lutron (Hi-lume Premier 0.1% Eco System LED Driver with Soft-on, Fade-to-black dimming technology)</li> <li>• DALI 2</li> </ul>				<ul style="list-style-type: none"> <li>• DUAL 0-10</li> <li>• DMX</li> <li>• DALI 2(DT6/DT8)</li> </ul>
POWER SUPPLY	Constant current driver 36Vdc/350mA	Constant current driver 36Vdc/450mA	Constant current driver 36Vdc/350mA	Constant current driver 36Vdc/450mA	Constant current driver 36Vdc/350mA
BEAM SPREAD	15°/24°/38°/60°				
OPTICS	Soft Focus / Frosted / Linear Spread / Prismatic				
DIFFUSERS	Honeycomb				
ADJUSTABILITY	35°				
HOUSING	IC RATED / AIR TIGHT / CCEA (CHICAGO PLENUM) / WET RATED				
FINISH	TRIMLESS/SEAMLESS				

### Product Features

- Revolutionary flush mounted, trimless & seamless design
- Made out of Environmentally Friendly Plaster Materials
- Our plaster fixture can be painted using your standard paint colors
- Energy efficient LED light engines
- Versatile field changeable optics
- Dimmable with a variety of commonly used drivers
- Fixtures can be used with all Smart House Systems such as Lutron, Vantage, Control 4, Crestron and others
- Easy installation for new construction and remodel applications
- Wet Location rated
- For best results, do not paint the inside of the fixture. If painting is necessary we recommend using a spraying technique. Painting with a brush will reveal brush strokes when illuminated.

