



Installation Instruction

LIGHT & GREEN LLC


RR-D35/RR-D45/RR-D65/RR-D95/RR-D125

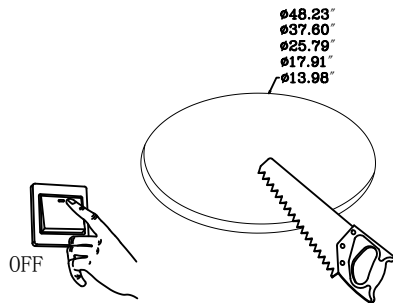


- ① turn off power before installation, cut out a hole with proper size in the ceiling: D35: 13.98" / D45: 17.91" / D65: 25.79" / D95: 37.60" / D125: 48.23"




- ② fix mesh holders on the lamp with screws.

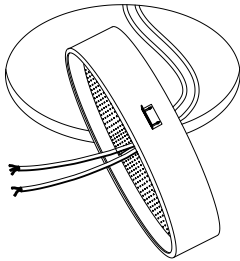


- ③ put the lamp into the hole, mesh holders are over the ceiling plate, and pull out the lead wire

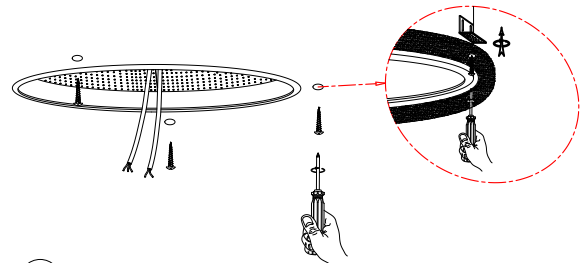


- ④ put long screws through ceiling plate and mesh holders, to fix the lamp on the ceiling

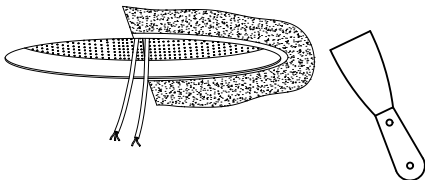


- ⑤ fill up with plaster sealant between lamp and ceiling, and make the surface smooth

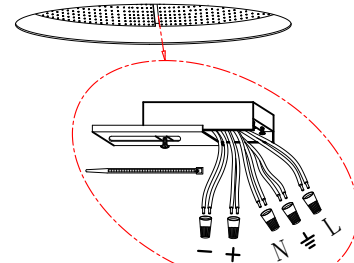

- ⑥ connect wires via connector, tighten wires by nylon cable ties: "L" for live wire; "N" for neutral wire; ⏏ for earth; "+" for dimming positive; "-" for dimming negative.

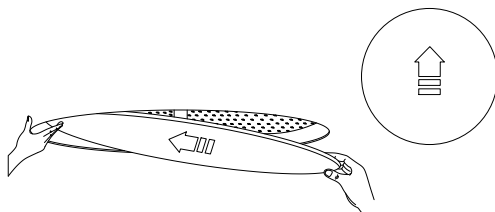

- ⑦ fix the acrylic diffuser



- ⑧ turn on power

Accessories:

RR-D35/RR-D45/RR-D65

1. mesh holders 3 Pcs, screws and nuts 6Pcs;
2. connectors 5pcs
3. acrylic diffuser 1pc.
4. nylon cable ties 5pcs;

RR-D95/RR-D125

1. mesh holders 6 Pcs, screws and nuts 12Pcs;
2. connectors 5pcs
3. acrylic diffuser 1pc.
4. nylon cable ties 5pcs;