

INSTALLATION INSTRUCTIONS

PREPARING THE LUMINAIRE

RECESSED CEILING LUMINAIRE: LG-8018 / LG-8019

SAVE THESE INSTRUCTIONS


WARNING: Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE: To re-lamp, replacement parts or additional information, contact or visit manufacturer at www.lightandgreen.com


STEP 1

Identify Components


- a. Fixture Assembly.
- b. LED Driver J-Box.
- c. LED Insert
- d. Adjustable Perforated Brackets.



Fixture Assembly.




LED Driver J-Box.




LED Insert



Adjustable Perforated Brackets

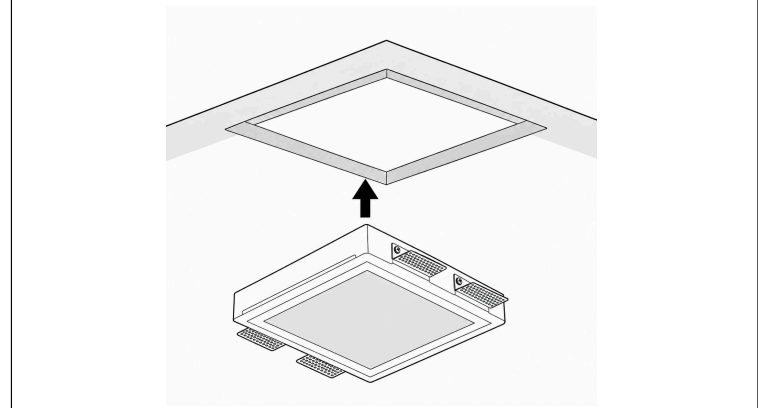


Step 4 – Insert Fixture Assembly and Secure to Ceiling: a. Tilt and insert the Fixture Assembly through the square ceiling opening. b. Position the Adjustable Perforated Brackets above the drywall ceiling. c. Ensure the Fixture Assembly is square and flush with the ceiling. d. From below, secure the Adjustable Perforated Brackets to the drywall ceiling using suitable drywall/gypsum screws (by others). Verify that the Fixture Assembly is level and secure.

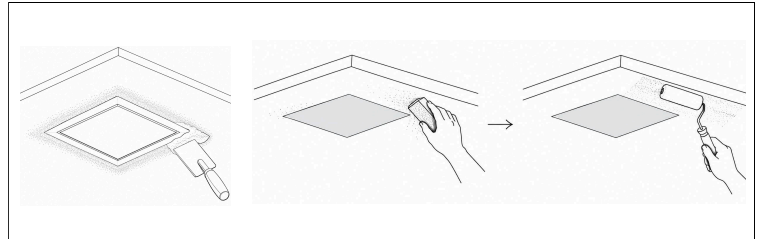


Step 5 – Apply Joint Compound, Sand and Paint: a. Apply joint compound over the seam and outer gypsum edge of the fixture. b. Feather the compound onto the ceiling for a smooth, seamless finish. Keep the Fixture Opening clear. c. After the joint compound dries, sand the finished surface smooth. d. Paint the ceiling and exposed gypsum surface to match. Do not paint the diffuser.


Step 2 – Adjust Perforated Brackets: a. Attach the Adjustable Perforated Brackets to the Fixture Assembly. b. Align each bracket with the ceiling thickness and tighten the bracket screws to secure.

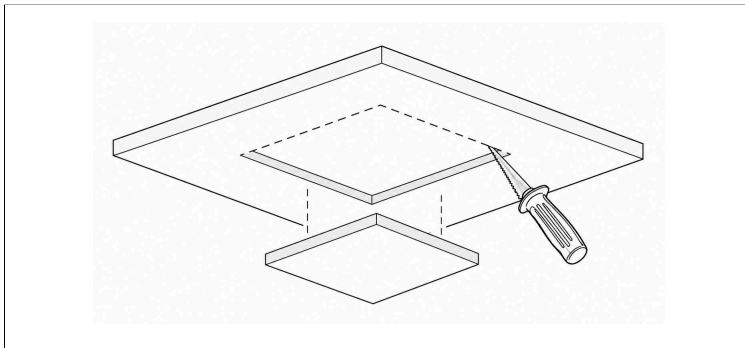

Step 3 – Cut Ceiling Opening: a. Mark a square opening according to the approved cut-out dimensions for the applicable model. b. Cut the opening in the drywall ceiling.

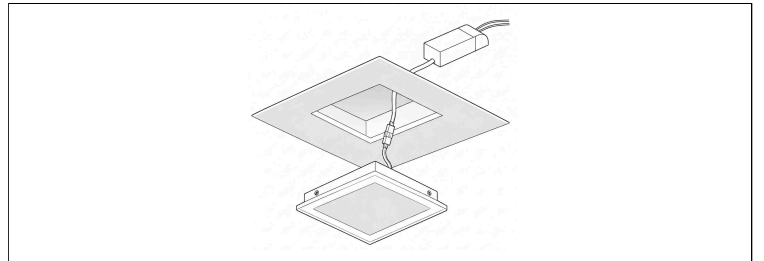

Step 6 – Connect LED Driver: a. Complete the LED Driver connections in accordance with the wiring diagram and local electrical code. b. Connect the LED Insert to the LED Driver using the provided connector.

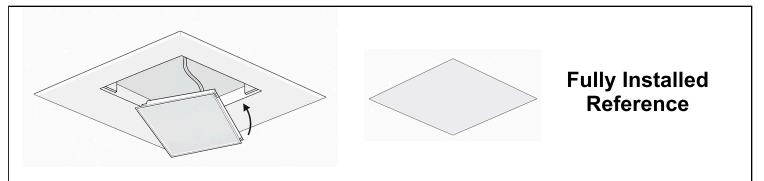

Step 7 – Install LED Insert: a. Insert one edge of the connected LED Insert into the Fixture Opening. b. Rotate the LED Insert upward and seat it on the internal support ledge. Confirm that the LED Insert sits flush and is secure.