

INSTALLATION INSTRUCTIONS

PREPARING THE LUMINAIRE FOR SHALLOW HOUSING 1004-SQ


LiGHT & GREEEN
LIGHTING COMPANY

SAVE THESE INSTRUCTIONS

RECESSED CEILING MOUNT LUMINAIRE:

Model: LG-9001, LG-9003, LG-9013, LG-9014, LG-9015, LG-9018, LG-9020

HARMONY DOWNLIGHTS

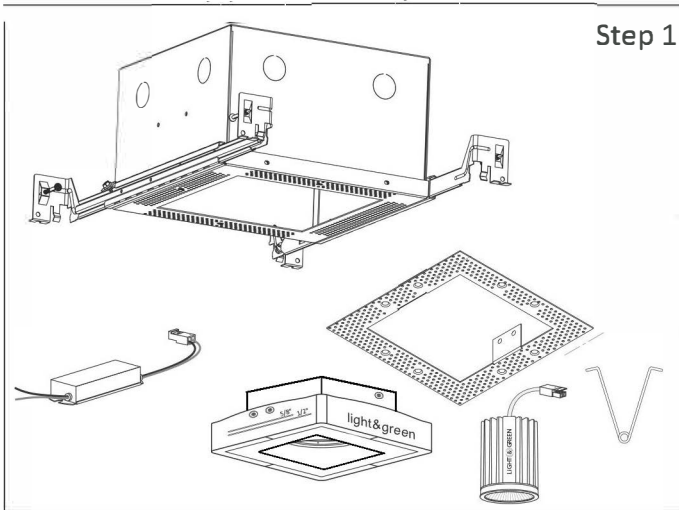


Step 1

READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE.

WARNING - Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:


To re-lamp, replacement parts or additional information, contact or visit manufacturer at www.lightandgreen.com.

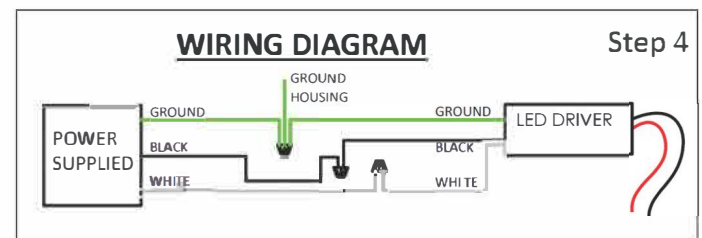

Step 4

Step 1 - Luminaire Parts and Tools for Installation:


a. Unpack all Fixture Parts and get to know them.

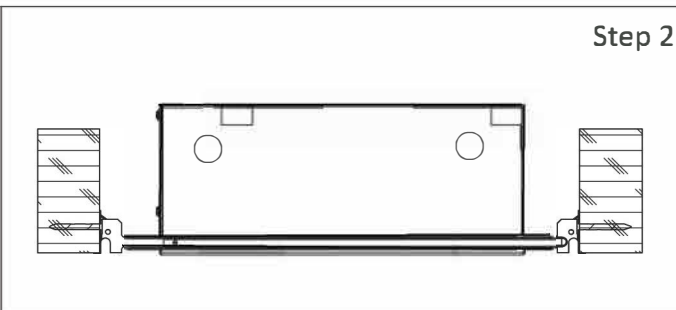

Step 2

Step 2 - Install Housing to Wood-Joist:

- Select the location to Install this Fixture on Ceiling.
- Place Hanger Bar to Wood Joist and secure using the captive Nails.
- Assure that the housing aperture will be flush to the back of the drywall.

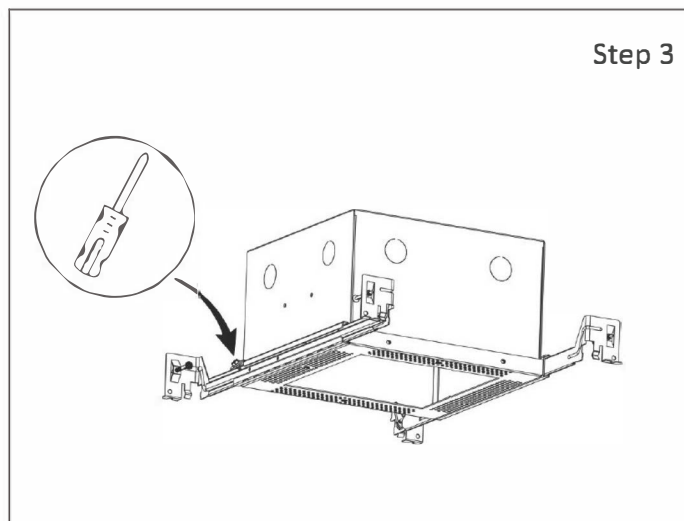


Step 3

Step 3 - Lock Housing in Place

a. Adjust horizontally and lock in place with the screw provided.

Step 4 - Connect Power Supply.


- Connect Power Supply using Conduit Fitting (By Others).
- Pull out Supply Wires and make Wiring Connections, see Wire Diagram.

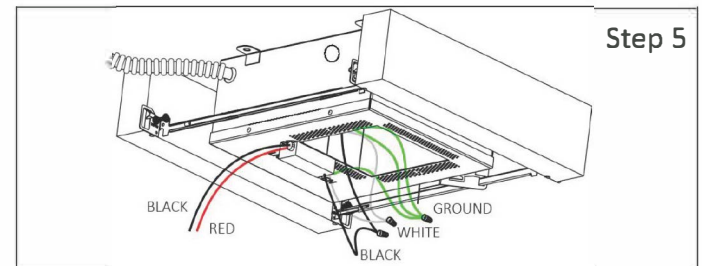

Step 5

Step 5 - Place the Driver:

a. Place the driver inside the housing, using the clip will keep it out of the way.

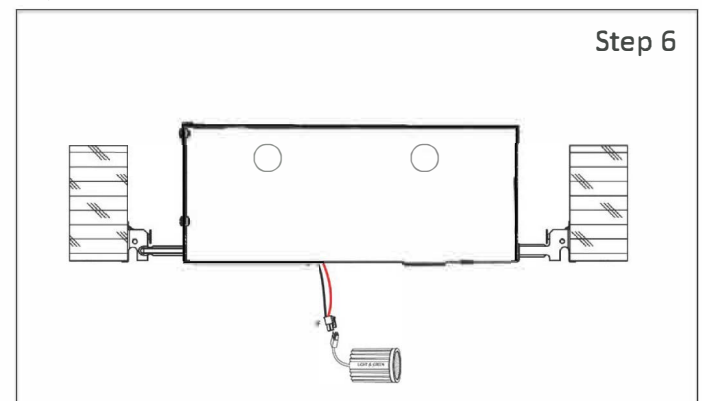

Step 6

Step 6 - Test the LED:

- Run Output Wires through the Housing Opening.
- "*" Indicates the (Quick Connector) that comes with the LED and must be connected to driver; (red wire to red wire & black wire to black wire)
- Connect the LED Light and turn Switch On to make sure it lights up.
- Remove the LED and save for later.

INSTALLATION INSTRUCTIONS

PREPARING THE LUMINAIRE

RECESSED CEILING MOUNT LUMINAIRE:


Model: LG-9001, LG-9003, LG-9013, LG-9014, LG-9015, LG-9018, LG-9020

HARMONY DOWNLIGHTS

LiGHT & GREEN


LIGHTING COMPANY

SAVE THESE INSTRUCTIONS

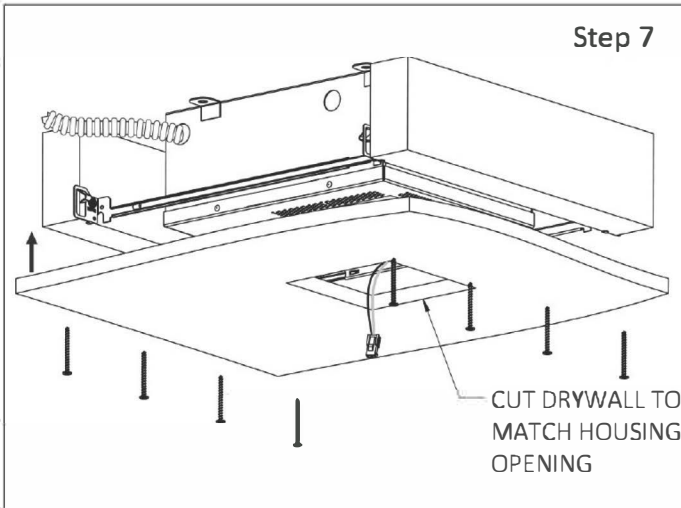


Step 7 - Cut-Out Dry-wall:

- Mark the Fixture location on Dry-wall "Sheet" and cut-out.

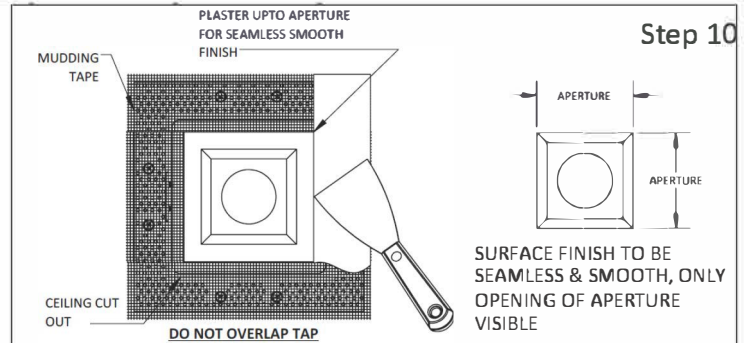


Step 10 - Plastering Ceiling Cut-Out with fixture and Paint

- Apply mudding tape, joining **ONLY** the outer lip of the fixture to cover the drywall **DO NOT OVERLAP TAPE**
- Mud over the face of the fixture, avoiding the opening (APERTURE). Remove excess mud from the opening using finger or blunt object, reestablishing the shape of the opening. Repeat this step until you reach desired texture
- Insert Foam (provided) to cover the Fixture Hole while Painting ceiling. (OPTIONAL) Paint inside the fixture using a spraying method to match Ceiling Paint Finish. **DO NOT USE BRUSH TO PAINT INSIDE FIXTURE!!!**

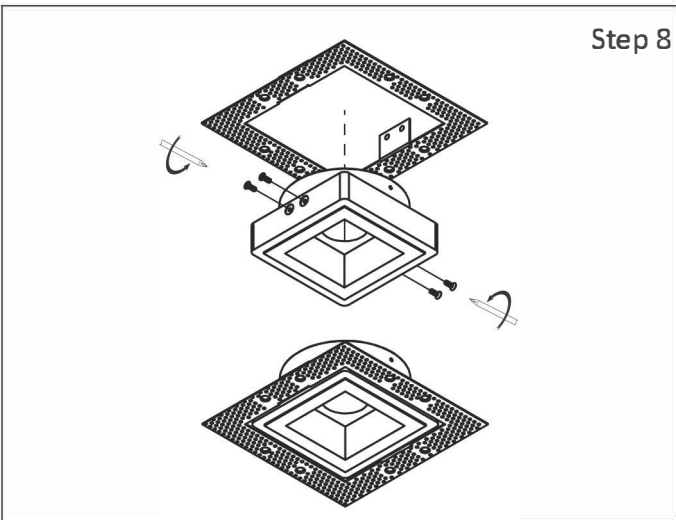


Step 8 - Harmony trim assembly:

- Assemble Harmony trim with mesh by aligning hole of mesh and Harmony trim
- Secure with 2 screws on each side (Provided)

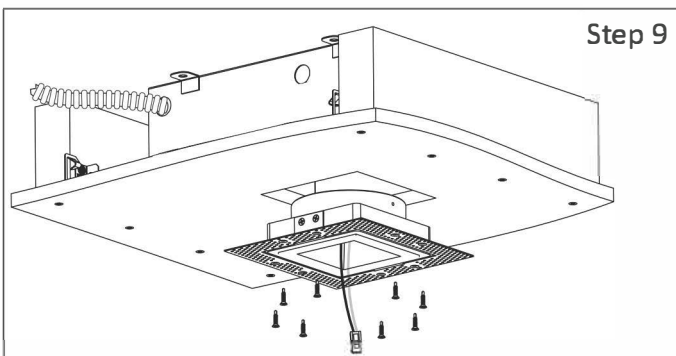


Step 9 - Attach Harmony trim to Housing:

- Align Harmony trim assembly and insert in the Cut-out.
- Secure Harmony trim assembly with (plaster/sheet metal screws(8) by others)

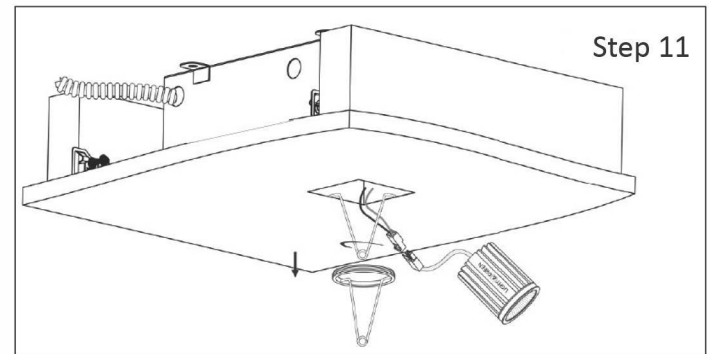

Step 11 - Remove Fixture Ring and Connect LED Light:

- Insert Ring Clip and Turn Counterclockwise to remove LED Ring Holder.
- Connect LED Light.

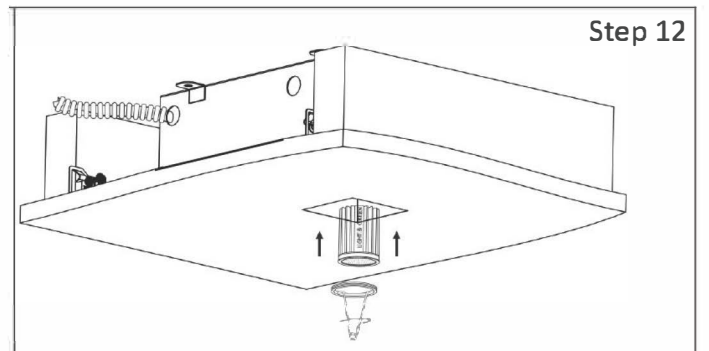

Step 12 - Replace Fixture Ring and Install LED Light:

- Insert LED Light and Turn Clockwise Fixture Ring to hold LED.

